

# **Encoder WDG 58D - Discontinued product**

www.wachendorff-automation.com/wdg58d

#### **Wachendorff Automation**

#### ... systems and encoders

- · Complete systems
- Industrial rugged encoders to suit your application
- Standard range and customer versions
- Maximum permissible loads
- 48-hour express production
- Made in Germany
- Worldwide distributor network

**Industrie ROBUST** 



## **Encoder WDG 58D**

## **Discontinued product**





- Rugged industrial standard encoder
- Up to 25000 PPR by use of high grad electronics
- Protection to IP67, shaft sealed to IP65
- High noise immunity
- High shaft load radial 400N, axial 400N
- Maximum mechanical and electrical safety
- Full connection protection with 10 VDC up to 30 VDC
- With light reserve warning
- Optional: -40 °C up to +80 °C

www.wachendorff-automation.com/wdg58d

Resolution	
Max. pulses per revolution PPR	up to 25000 PPR
Mechanical Data	
Housing	
Flange	clamping flange
Flange material	aluminium
Housing cap	aluminium, powder coated
Housing	Ø 58 mm
Cam mounting	pitch 69 mm
Shaft(s)	
Shaft material	stainless steel
Starting torque	approx. 1 Ncm at ambient temperature
Shaft	Ø 12 mm
Shaft length	L: 25 mm
Max. Permissible shaft loading radial	400 N
Max. Permissible shaft loading axial	400 N
Bearings	
Bearings type	2 precision ball bearings
Nominale service life	4 x 10'8 revs. at 100 % rated shaft load 6 x 10'9 revs. at 40 % rated shaft load 5 x 10'10 revs. at 20 % rated shaft load load
Max. operating speed	8000 rpm
<b>Machinery Directive: basic</b>	data safety integrity level
MTTF <sub>d</sub>	200 a
Mission time (TM)	25 a
Nominale service life (L10h)	5 x 10'10 revs. at 20 % rated shaft load and 8000 rpm
Diagnostic coverage (DC)	0 %
Electrical Data	
Power supply/Current consumption	4,75 VDC up to 5,5 VDC: max. 100 mA
D 1 /0 :	-1/50

Power supply/Current consumption

Power supply/Current consumption

Output circuit	TTL TTL, RS422 compatible, inv. HTL HTL, inv. 1 Vpp sin/cos
Pulse frequency	TTL 5000 ppr: max. 200 kHz HTL 5000 ppr: max. 200 kHz TTL more than 1200 ppr: max. 2 MHz HTL more than 1200 ppr: max. 600 kHz 1 Vpp sin/cos: max. 100 kHz
Channels	AB ABN and inverted signals
Load	max. 40 mA / channel @ 1 Vpp sin/cos: min. 120 Ohm
Circuit protection	circuit type F24, G24, H24, I24, P24, R24 only
Accuracy	_
Phase offset	90° ± max. 7.5 % of the pulse length
pulse-/pause-ratio	5000 ppr: 50 % ± max. 7 % >5000 ppr: 50 % ± max. 10 %
General Data	
Weight	approx. 250 g
Connections	cable or connector outlet
Protection rating (EN 60529)	IP67, shaft sealed to IP65 (IP65 all around with S7)
Operating temperature	Connector: -20 °C up to +85 °C, cable: -20 °C up to -80 °C, (Option ACA: -40 °C up to +85 °C) 1 Vpp: -10 °C up to +70 °C
Storage temperature	Connector: -30 °C up to +85 °C, cable: -20 °C up to +80 °C, option ACA: -40 °C up to +85 °C
More Information	
General technical data	


More Information
General technical data http://www.wachendorff-automation.com/gtd
Options http://www.wachendorff-automation.com/acc

5 VDC up to 30 VDC: max. 70 mA

10 VDC up to 30 VDC: max. 100 mA



#### Cable connection K2, K3, L2, L3 with 2 m cable

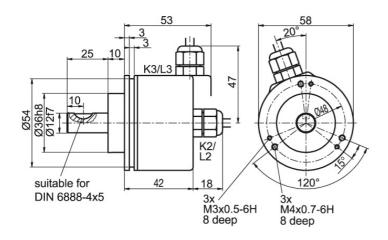


Desc	Description		
K2	axial, shield not connected	•	
L2	axial, shield connected to encoder housing	•	
К3	radial, shield not connected	•	
L3	radial, shield connected to encoder housing	•	

Assignments						
	K2, L2, K3, L3	K2, K3, L2, L3	K2, L2, K3, L3	K2, L2, K3, L3	K2, L2, K3, L3	
Circuit	F05, H05, F24, H24, H30	G05, G24	105, 124, 524	P05, R05, P24, R24, 245, 645, R30	SIN	
GND	WH	WH	WH	WH	WH	
(+) Vcc	BN	BN	BN	BN	BN	
Α	GN	GN	GN	GN	GN	
В	YE	YE	YE	YE	GY	
N	GY	GY	GY	GY	-	
Light reserve warning	-	PK	PK	-	-	
A inv.	-	-	RD	RD	YE	
B inv.	-	-	BK, (BU at ACA)	BK, (BU at ACA)	PK	
N inv.	-	-	VT	VT	-	
Shield	flex	flex	flex	flex	flex	



## Connector (M16x0.75) SI, SH, 5-, 6-, 8-, 12-pin

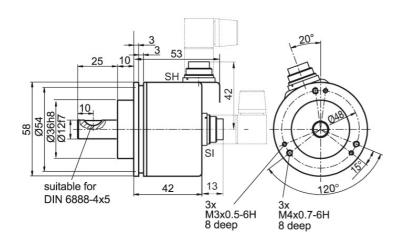


Descr	Description	
SI5	axial, 5-pin, Connector connected to encoder housing	-
SH5	radial, 5-pin, Connector connected to encoder housing	-
SI6	axial, 6-pin, Connector connected to encoder housing	-
SH6	radial, 6-pin, Connector connected to encoder housing	-
SI8	axial, 8-pin, Connector connected to encoder housing	•
SH8	radial, 8-pin, Connector connected to encoder housing	•
SI12	axial, 12-pin, Connector connected to encoder housing	•
SH12	radial, 12-pin, Connector connected to encoder housing	•

Assignments										
	SI5, SH5						SI12, SH12	SI12, SH12		
	5-pin	6-pin	6-pin	8-pin	8-pin	8-pin	12-pin	12-pin	12-pin	12-pin
	4 3 0 2 0 5 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	4 • • • 2 • 6 • 5 5 • 1	4 • • • 2 • 6 • • 5 5 • 1	5 2 4 3 • 8 • 1 7 · 6	5, 2, 4 3, 6, 6, 1 7, 6	5 6 4 3 6 6 1 7 6	D F G M H	D F G M H	D F G M H	D F G M H H J J A K
Circuit	F05, H05, F24, H24, H30	G05, G24	F05, H05, F24, H24, H30	F05, H05, F24, H24, H30	P05, R05, P24, R24, R30, 245, 645	SIN	G05, G24	F05, H05, F24, H24, H30		SIN
GND	1	6	6	1	1	1	K, L	K, L	K, L	K, L
(+) Vcc	2	1	1	2	2	2	M, B	M, B	M, B	M, B
Α	3	2	2	3	3	3	Е	Е	Е	Е
В	4	4	4	4	4	4	Н	Н	Н	Н
N	5	3	3	5	5	-	С	С	С	-
Light reserve warning	-	5	-	-	-	-	G	-	-	-
A inv.	-	-	-	-	6	6	-	-	F	F
B inv.	-	-	-	-	7	7	-	-	Α	Α
N inv.	-	-	-	-	8	-	-	-	D	-
n. c.	-	-	5	6, 7, 8	-	5, 8	A, D, F, J	A, D, F, G, J	G, J	D, G, J
Shield	-	-	-	-	-	-	-	-	-	-



## Connector (M16x0.75) S2, S3, 7-pin

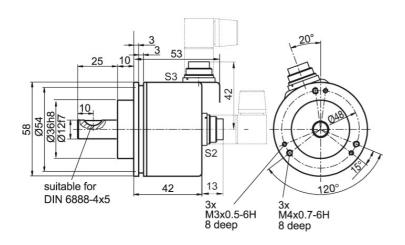


Desc	cription	ABN inv. poss.
S2	axial, 7-pin, Connector connected to encoder housing	-
S3	radial, 7-pin, Connector connected to encoder housing	-

Assignments					
	S2, S3	S2, S3			
	7-pin	7-pin			
	3 • 4 2 • 7 • • 5 1 • • 6	3 • •4 2 • 7 • •5 1 • •6			
Circuit	G05, G24	F05, H05, F24, H24, H30			
GND	1	1			
(+) Vcc	2	2			
Α	3	3			
В	4	4			
N	5	5			
Light reserve warning	6	-			
A inv.	-	-			
B inv.	-	-			
N inv.	-	-			
n. c.	7	6, 7			
Shield	-	-			



## Connector (M23) S4, S5, 12-pin

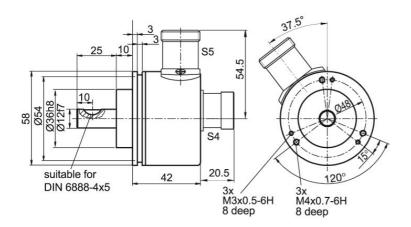


Desc	cription	ABN inv. poss.
S4	axial, 12-pin, Connector connected to encoder housing	•
S5	radial, 12-pin, Connector connected to encoder housing	•

Assignments							
	S4, S5 S4, S5 S4, S5 S4, S5				S4, S5		
	12-pin	12-pin	12-pin	12-pin	12-pin		
	10 12 8 20 10 12 07 3 0 6 4 0 5	10 9 8 20 10 12 07 30 0 6	10 12 07 3 0 06 4 05	10 12 8 20 10 12 07 30 0 6	10 9 8 20 10 12 07 30 0 6		
Circuit	G05, G24	F05, H05, F24, H24, H30	105, I24, 524	P05, R05, P24, R24, 245, 645, R30	SIN		
GND	10	10	10	10	10		
(+) Vcc	12	12	12	12	12		
Α	5	5	5	5	5		
В	8	8	8	8	8		
N	3	3	3	3	-		
Light reserve warning	11	-	11	-	-		
A inv.	-	-	6	6	6		
B inv.	-	-	1	1	1		
N inv.	-	-	4	4	-		
n. c.	1, 2, 4, 6, 7, 9	1, 2, 4, 6, 7, 9, 11	2, 7, 9	2, 7, 9, 11	2, 3, 4, 7, 9, 11		
Shield	-	-	-	-	-		



## Connector (M23) S4R, S5R, 12-pin (clockwise)

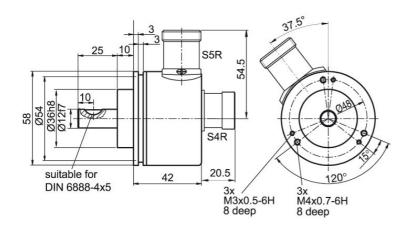


Desc	ription	ABN inv. poss.		
S4R	axial, 12-pin, Connector connected to encoder housing	•		
S5R	radial, 12-pin, Connector connected to encoder housing	•		

Assignments											
	S4R, S5R	S4R, S5R	S4R, S5R	S4R, S5R	S4R, S5R						
	12-pin	12-pin	12-pin	12-pin	12-pin						
	8 9 0 1 7 0 10 02 6 0 03 5 0 04 R	8 9 12 10 1 7 10 02 6 0 3 5 0 4	8 9 12 10 1 7 10 02 6 0 3 5 0 4	8 9 0 1 7 0 10 02 6 0 03 5 0 04 R	8 9 0 1 7 12 10 0 2 6 0 0 3 5 0 4 R						
Circuit	G05, G24	F05, H05, F24, H24, H30	105, 124, 524	P05, R05, P24, R24, 245, 645, R30	SIN						
GND	10		10	10	10						
(+) Vcc	12	12	12	12	12						
Α	5	5	5	5	5						
В	8	8	8	8	8						
N	3	3	3	3	-						
Light reserve warning	11	-	11	-	-						
A inv.	-	-	6	6	6						
B inv.	-	-	1	1	1						
N inv.	-	-	4	4	-						
n. c.	1, 2, 4, 6, 7, 9	1, 2, 4, 6, 7, 9, 11	2, 7, 9	2, 7, 9, 11	2, 3, 4, 7, 9, 11						
Shield	-	-	-	-	-						



#### MIL-connector S6, 6-pin

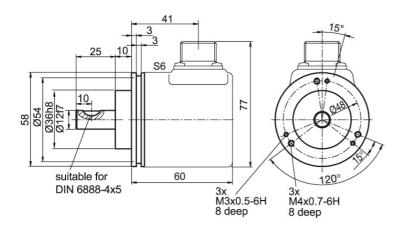


Description ABN inv. poss.

Assignments								
	6-pin	6-pin						
Circuit	G05, G24	F05, H05, F24, H24, H30						
GND	Α	Α						
(+) Vcc	F	F						
Α	С	С						
В	В	В						
N	D	D						
Light reserve warning	E	-						
A inv.	-	-						
B inv.	-	-						
N inv.	-	-						
n. c.	-	Е						
Shield	-	-						



## Valve-connector (IP65) S7, 4-pin

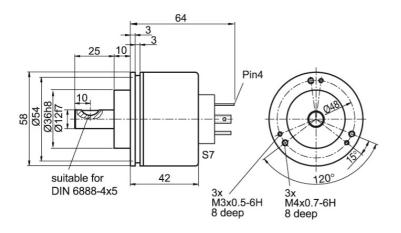


Description ABN inv. poss.

Assignments						
	4-pin					
Circuit	F05, H05, F24, H24, H30					
GND	1					
(+) Vcc	2					
Α	3					
В	4					
N	-					
Light reserve warning	-					
A inv.	-					
B inv.	-					
N inv.	-					
n. c.	-					
Shield	-					



#### Sensor-connector (M12x1) SB, SC, 4-, 5-, 8-, 12-pin

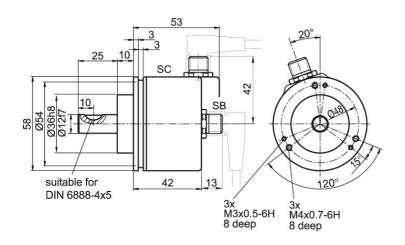

Descr	ription	ABN inv. poss.
SB4	axial, 4-pin, Connector connected to encoder housing	<del>-</del>
SC4	radial, 4-pin, Connector connected to encoder housing	-
SB5	axial, 5-pin, Connector connected to encoder housing	-
SC5	radial, 5-pin, Connector connected to encoder housing	-
SB8	axial, 8-pin, Connector connected to encoder housing	•
SC8	radial, 8-pin, Connector connected to encoder housing	•
SB12	axial, 12-pin, Connector connected to encoder housing	•
SC12	radial, 12-pin, Connector connected to encoder housing	•

Assignments											
_	SB4, SC4	SB5, SC5	SB8, SC8 SB8, SC8 S		SB8, SC8	SB12, SC12	SB12, SB12, SC12 SC12		SB12, SC12		
	4-pin	5-pin	8-pin	8-pin 8-pin		8-pin 12-pin		12-pin 12-pin			
	1 3	1 2	3 6 5	3 6 5	3 6 5	6 5 11,4 3 10 7 12,8 9	6 5 10 7 12 8 9	5 11, 4, 3 6, 2 10 7, 12, 8, 9	6 11 4 3 2 10 7 12 8 9		
Circuit	F05, H05, F24, H24, H30	F05, H05, F24, H24, H30	F05, H05, F24, H24, H30		SIN	G05, G24	F05, H05, F24, H24, H30	105, 124, 524	P05, R05, P24, R24, 245, 645, R30		
GND	3	3	1	1	1	3	3	3	3		
(+) Vcc	1	1	2	2	2	1	1	1	1		
Α	2	4	3	3	3	4	4	4	4		
В	4	2	4	4	5	6	6	6	6		
N	-	5	5	5	-	8	8	8	8		
Light reserve warning	-	-	-	-	-	5	-	5	-		
A inv.	-	-	-	6	4	-	-	9	9		
B inv.	-	-	-	7	6	-	-	7	7		
N inv.	-	-	-	8	-	-	-	10	10		
n. c.	-	-	6, 7, 8	-	7, 8	2, 7, 9, 10, 11, 12	2, 5, 7, 9, 10, 11, 12	2, 11, 12	2, 5, 11, 12		
Shield	-	-	-	-	-	-	-	-	-		



#### **Options**

Low temperature Order key

The encoder WDG 58D - Discontinued product with the output circuit types F24, G24, H24, **ACA** I24, P24, R24, F05, G05, I05, H05, P05, R05, 245, 524, 645 is also available with the extended temperature range -40 °C up to +80 °C (measured at the flange).

Cable length Order key

The encoder WDG 58D - Discontinued product can be supplied with more than 2 m cable. **XXX = Decimeter** The maximum cable length depends on the supply voltage and the frequency; see www. wachendorff-automation.com/atd

Please extend the standard order code with a three figure number, specifying the cable length in decimetres.

Example: 5 m cable = 050



ample Order No.	Туре					Your encode					
WDG 58D	WDG 58D										
	Pulses per revolution PPR:										
5000	2, 5, 10, 15, 20, 24, 25, 30, 36, 40, 48, 50, 60, 64, 72, 87, 90, 100, 120, 125, 127, 128, 150, 160, 180, 200, 216, 236, 240, 250, 254, 256, 300, 314, 320, 360, 400, 500, 512, 571, 600, 625, 720, 750, 768, 800, 810, 900, 1000, 1024, 1200, 1250, 1270, 1440, 1500, 1800, 2000, 2048, 2400, 2500, 3000, 3600, 4000, 4096, 4685, 5000, 10000, 12500, 20000, 25000 1 Vss Sin/Cos only 1024, 2048 Other PPRs on request										
	Channels:										
ABN	AB, ABN (S	IN: AB)									
		,									
	Output circ	uit									
	Resolution PPR	Power supply VDC	Output circuit	Light reserve warning	Order key						
	up to 2500	5 - 30	HTL	-	H30						
		5 - 30	HTL inverted	-	R30						
		4.75 - 5.5	TTL	•	G05						
		4.75 - 5.5	TTL	-	H05						
		4.75 - 5.5	TTL, RS422 comp., inverted	•	105						
		4.75 - 5.5	TTL, RS422 comp., inverted	-	R05						
	up to 5000	10 - 30	HTL	•	G24						
004	up to 5000	10 - 30	HTL	-	H24						
G24		10 - 30	HTL inverted	•	124						
		10 - 30	HTL inverted	-	R24						
		10 - 30	TTL, RS422 comp., inverted	•	524						
		10 - 30	TTL, RS422 comp., inverted	-	245						
		4.75 - 5.5	TTL	-	F05						
	(higher frequency) 1200 up to	4.75 - 5.5	TTL, RS422 comp., inverted	-	P05						
		10 - 30	HTL	-	F24						
	25000 up to	10 - 30	HTL inverted	-	P24						
		10 - 30	TTL, RS422 comp., inverted	-	645						
	1024, 2048	4, 2048   4.75 - 5.5   1 Vpp sin/cos   -   SIN									



	Electrical connections		
	Description	ABN inv. poss.	Order key
	Cable: length (2 m standard, WDG 58T: 1 m)	<u> </u>	1
	axial, shield not connected	•	K2
	axial, shield connected to encoder housing	•	L2
	radial, shield not connected	•	K3
	radial, shield connected to encoder housing	•	L3
	Connector: (shield connected to encoder housing)		
	connector, M16x0.75, 5-pin, axial	-	SI5
	connector, M16x0.75, 5-pin, radial	-	SH5
	connector, M16x0.75, 6-pin, axial	-	SI6
	connector, M16x0.75, 6-pin, radial	-	SH6
	connector, M16x0.75, 8-pin, axial	•	SI8
	connector, M16x0.75, 8-pin, radial	•	SH8
	connector, M16x0.75, 12-pin, axial	•	SI12
K2	connector, M16x0.75, 12-pin, radial	•	SH12
	connector, M16x0.75, 7-pin, axial	-	S2
	connector, M16x0.75, 7-pin, radial	-	S3
	connector, M23, 12-pin, axial	•	S4
	connector, clockwise pin count, M23, 12-pin, axial	•	S4R
	connector, M23, 12-pin, radial	•	S5
	connector, clockwise pin count, M23, 12-pin, radial	•	S5R
	sensor-connector, M12x1, 4-pin, axial	-	SB4
	sensor-connector, M12x1, 4-pin, radial	-	SC4
	sensor-connector, M12x1, 5-pin, axial	-	SB5
	sensor-connector, M12x1, 5-pin, radial	-	SC5
	sensor-connector, M12x1, 8-pin, axial	•	SB8
	sensor-connector, M12x1, 8-pin, radial	•	SC8
	sensor-connector, M12x1, 12-pin, axial	•	SB12
	sensor-connector, M12x1, 12-pin, radial	•	SC12
	Options		
	Description	Order key	
	Without option		npty
	Low temperature		CA
	Cable length	XXX = E	Decimeter

Example Order No.=   WDG 58D   5000   ABN   G24   K2     WDG 58D   Y	Example Order No.=	WDG 58D 5000	ABN G24	1 N2 1		WDG 58D						Your encoder
--	--------------------	--------------	---------	--------	--	---------	--	--	--	--	--	--------------





For further information please contact our local distributor. Here you find a list of our distributors worldwide. http://www.wachendorff-automation.com/distributors\_worldwide.html



Wachendorff Automation GmbH & Co. KG Industriestrasse 7 • D-65366 Geisenheim

Phone: +49 67 22 / 99 65 25 Fax: +49 67 22 / 99 65 70 E-Mail: wdg@wachendorff.de www.wachendorff-automation.de

