



# Online Data Sheet

## Encoder WDGI 36E


[www.wachendorff-automation.com/wdgi36e-k](http://www.wachendorff-automation.com/wdgi36e-k)

### Wachendorff Automation

#### ... systems and encoders

- Complete systems
- Industrial rugged encoders to suit your application
- Standard range and customer versions
- Maximum permissible loads
- 48-hour express production
- Made in Germany
- Worldwide distributor network

# Encoder WDGI 36E (magnetic)



- Compact and robust
- All pulse numbers from 1 to 1,024 I/U available
- Robust construction for industrial use
- Protection to IP67, shaft sealed to IP65

[www.wachendorff-automation.com/wdgi36e-k](http://www.wachendorff-automation.com/wdgi36e-k)

Resolution	
Pulses per revolution PPR	up to 1024 PPR

Mechanical Data	
Housing	
Flange	hollow shaft (blind-bored)
Flange material	aluminum
Housing cap	stainless steel
- 1. Spring plate compensation	axial: ±1.2 mm, radial: ±0.4 mm
Housing	Ø 36 mm

Shaft(s)	
Shaft material	stainless steel
Starting torque	approx. 0.3 Ncm at ambient temperature

Shaft	Ø 8 mm
Advice	with adapter sleeve
Insertion depth min.	10 mm
Insertion depth max.	14.5 mm
Max. Permissible shaft loading radial	80 N
Max. Permissible shaft loading axial	50 N

Shaft	Ø 10 mm
Advice	with adapter sleeve
Insertion depth min.	10 mm
Insertion depth max.	14.5 mm
Max. Permissible shaft loading radial	80 N
Max. Permissible shaft loading axial	50 N

Shaft	Ø 12 mm
Insertion depth min.	10 mm
Insertion depth max.	14.5 mm
Max. Permissible shaft loading radial	80 N
Max. Permissible shaft loading axial	50 N

Shaft	Ø 14 mm
Insertion depth min.	10 mm
Insertion depth max.	14.5 mm
Max. Permissible shaft loading radial	80 N

Max. Permissible shaft loading axial	50 N
--------------------------------------	------

Shaft	Ø 15 mm
Insertion depth min.	10 mm
Insertion depth max.	14.5 mm
Max. Permissible shaft loading radial	80 N
Max. Permissible shaft loading axial	50 N

Bearings	
Bearings type	2 precision ball bearings
Nominale service life	1.4 x 10 <sup>8</sup> revs. at 100 % rated shaft load 2 x 10 <sup>9</sup> revs. at 40 % rated shaft load 1.7 x 10 <sup>10</sup> revs. at 20 % rated shaft load
Max. operating speed	12000 rpm

Machinery Directive: basic data safety integrity level	
MTTF <sub>d</sub>	3620 a
Mission time (TM)	25 a
Nominale service life (L10h)	1.7 x 10 <sup>10</sup> revs. at 20 % rated shaft load and 12000 rpm
Diagnostic coverage (DC)	0 %

Electrical Data	
Power supply/Current consumption	5 VDC up to 30 VDC: typ. 40 mA
Output circuit	HTL HTL, inv.
Pulse frequency	1024 ppr: max. 200 kHz
Channels	ABN and inverted signals
Load	max. 40 mA / channel
Circuit protection	no

Accuracy	
Phase offset	90° ± max. 7.5 % of the period duration
pulse-/pause-ratio	at 1 ppr up to 128 ppr: 50 % ± max. 7 % 129 ppr - 256 ppr: 50 % ± max. 9 % 257 ppr - 512 ppr: 50 % ± max. 13 % 513 ppr - 1024 ppr: 50 % ± max. 18 %

Environmental data	
<b>Environmental data:</b>	

ESD (DIN EN 61000-4-2):	8 kV
Burst (DIN EN 61000-4-4):	2 kV
includes EMC:	DIN EN 61000-6-2 DIN EN 61000-6-3
Vibration: (DIN EN 60068-2-6)	50 m/s <sup>2</sup> (10 Hz up to 2000 Hz)
Shock: (DIN EN 60068-2-27)	1000 m/s <sup>2</sup> (6 ms)
Design:	according DIN VDE 0160

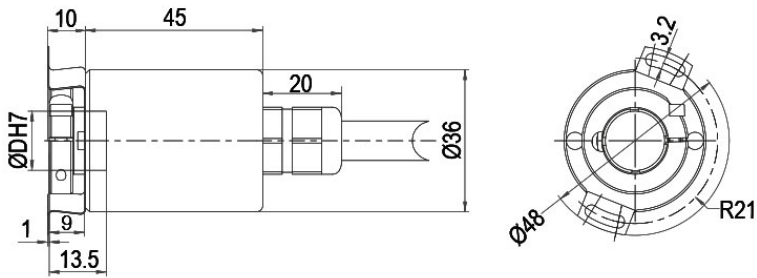
#### General Data

Weight	approx. 165 g
Connections	cable or connector outlet
Protection rating (EN 60529)	Housing: IP65, IP67; shaft sealed: IP65; (IP40 for K1)
Operating temperature	Connector: -40 °C up to +85 °C, cable: -20 °C up to +80 °C, (Option ACA: -40 °C up to +85 °C)
Storage temperature	Connector: -40 °C up to +85 °C, cable: -30 °C up to +80 °C (option ACA: -40 °C up to +85 °C)

#### More Information

General technical data and safety instructions  
<http://www.wachendorff-automation.com/gtd>

Options  
<http://www.wachendorff-automation.com/acc>

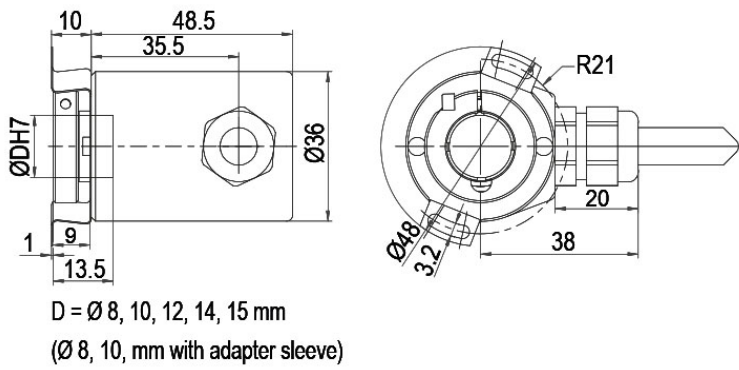
**Cable connection L2 axial with 2 m cable**


D = Ø 8, 10, 12, 14, 15 mm  
 (Ø 8, 10, mm with adapter sleeve)

**Description**
**ABN inv. poss.**
**L2** axial, shield connected to encoder housing

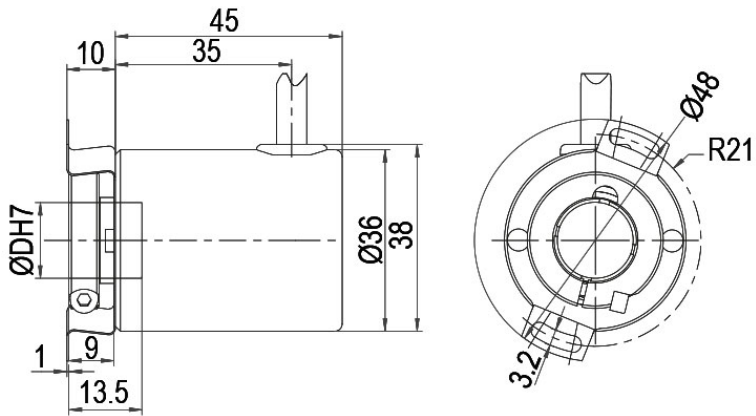
•

Assignments		
	L2	L2
<b>Circuit</b>	N35	M35
<b>GND</b>	WH	WH
<b>(+) Vcc</b>	BN	BN
<b>A</b>	GN	GN
<b>B</b>	YE	YE
<b>N</b>	GY	GY
<b>Light reserve warning</b>	-	-
<b>A inv.</b>	-	RD
<b>B inv.</b>	-	BK, (BU at ACA)
<b>N inv.</b>	-	VT
<b>Shield</b>	flex	flex

**Cable connection L3 radial with 2 m cable**

**Description**
**ABN inv. poss.**
**L3** radial, shield connected to encoder housing

•

Assignments		
	L3	L3
<b>Circuit</b>	N35	M35
<b>GND</b>	WH	WH
<b>(+) Vcc</b>	BN	BN
<b>A</b>	GN	GN
<b>B</b>	YE	YE
<b>N</b>	GY	GY
<b>Light reserve warning</b>	-	-
<b>A inv.</b>	-	RD
<b>B inv.</b>	-	BK, (BU at ACA)
<b>N inv.</b>	-	VT
<b>Shield</b>	flex	flex

**Cable K1 (IP40) radial with 2 m cable**


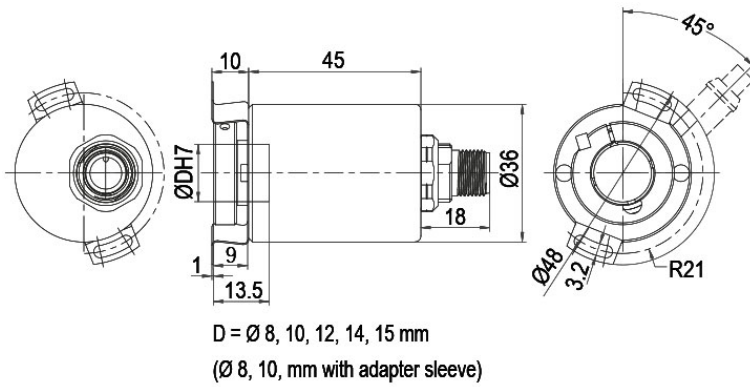
D = Ø 8, 10, 12, 14, 15 mm  
 (Ø 8, 10, mm with adapter sleeve)

**Description**
**ABN inv. poss.**
**K1** radial, shield not connected (IP40)

•

Assignments		
	K1	K1
<b>Circuit</b>	N35	M35
<b>GND</b>	WH	WH
<b>(+) Vcc</b>	BN	BN
<b>A</b>	GN	GN
<b>B</b>	YE	YE
<b>N</b>	GY	GY
<b>Light reserve warning</b>	-	-
<b>A inv.</b>	-	RD
<b>B inv.</b>	-	BK
<b>N inv.</b>	-	VT
<b>Shield</b>	flex	flex




**Sensor connector (M12x1) SB axial, 5-, 8-pin**



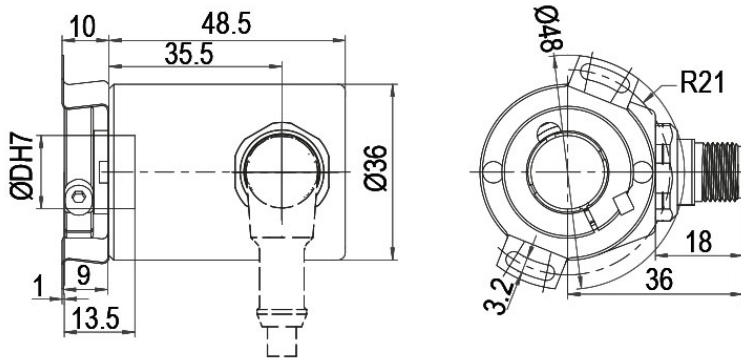
**Description**

**ABN inv. poss.**

<b>SB5</b>	axial, 5-pin, Connector connected to encoder housing	-
<b>SB8</b>	axial, 8-pin, Connector connected to encoder housing	•

Assignments			
	<b>SB5</b>	<b>SB8</b>	<b>SB8</b>
	<b>5-pin</b>	<b>8-pin</b>	<b>8-pin</b>
			
<b>Circuit</b>	N35	N35	M35
<b>GND</b>	3	1	1
<b>(+) Vcc</b>	1	2	2
<b>A</b>	4	3	3
<b>B</b>	2	4	4
<b>N</b>	5	5	5
<b>Light reserve warning</b>	-	-	-
<b>A inv.</b>	-	-	6
<b>B inv.</b>	-	-	7
<b>N inv.</b>	-	-	8
<b>n. c.</b>	-	6, 7, 8	-
<b>Shield</b>	-	-	-

**Sensor-connector (M12x1) SC radial, 5-, 8-pin**



D = Ø 8, 10, 12, 14, 15 mm

(Ø 8, 10, mm with adapter sleeve)

**Description**

**ABN inv. poss.**




**SC5** radial, 5-pin, Connector connected to encoder housing

-

**SC8** radial, 8-pin, Connector connected to encoder housing

•

**Assignments**

	<b>SC5</b>	<b>SC8</b>	<b>SC8</b>
	<b>5-pin</b>	<b>8-pin</b>	<b>8-pin</b>
			
<b>Circuit</b>	N35	N35	M35
<b>GND</b>	3	1	1
<b>(+) Vcc</b>	1	2	2
<b>A</b>	4	3	3
<b>B</b>	2	4	4
<b>N</b>	5	5	5
<b>Light reserve warning</b>	-	-	-
<b>A inv.</b>	-	-	6
<b>B inv.</b>	-	-	7
<b>N inv.</b>	-	-	8
<b>n. c.</b>	-	6, 7, 8	-
<b>Shield</b>	-	-	-



## Options

### Low temperature

The encoder WDG1 36E with the output circuit types N35, M35 is also available with the extended temperature range (measured at the flange).

### Order key

**ACA**

### Cable length

The encoder WDG1 36E can be supplied with more than 2 m cable. The maximum cable length depends on the supply voltage and the frequency; see [www.wachendorff-automation.com/atd](http://www.wachendorff-automation.com/atd)  
Please extend the standard order code with a three figure number, specifying the cable length in decimetres.  
Example: 5 m cable = 050

### Order key

**XXX = Decimeter**

Example Order No.	Type					Your encoder	
WDGI 36E	WDGI 36E					WDGI 36E	
<b>Bore size</b>							
12	08; 10= Ø 10 mm, Ø 1/4"; 12; 14; 15						
<b>Pulses per revolution PPR:</b>							
1024	1-1024 Other PPRs on request						
<b>Channels:</b>							
ABN	ABN						
<b>Output circuit</b>							
M35	<b>Resolution PPR</b>	<b>Power supply VDC</b>	<b>Output circuit</b>	<b>Light reserve warning</b>	<b>Order key</b>		
	1-1024	5 - 30 5 - 30	HTL HTL inverted	- -	N35 M35		
<b>Electrical connections</b>							
L2	<b>Description</b>			<b>ABN inv. poss.</b>	<b>Order key</b>		
	<b>Cable: length (2 m standard, WDG 58T: 1 m)</b>						
	radial, shield not connected (IP40)			•	K1		
	axial, shield connected to encoder housing			•	L2		
	radial, shield connected to encoder housing			•	L3		
	<b>Connector: (shield connected to encoder housing)</b>						
	sensor-connector, M12x1, 5-pin, axial			-	SB5		
	sensor-connector, M12x1, 5-pin, radial			-	SC5		
	sensor-connector, M12x1, 8-pin, axial			•	SB8		
sensor-connector, M12x1, 8-pin, radial			•	SC8			
<b>Options</b>							
<b>Description</b>			<b>Order key</b>				
Low temperature			ACA				
Without option			Empty				
Cable length			XXX = Decimeter				

<b>Example Order No.=</b>	WDGI 36E	12	1024	ABN	M35	L2		WDGI 36E						<b>Your encoder</b>
---------------------------	----------	----	------	-----	-----	----	--	----------	--	--	--	--	--	---------------------



For further information please contact our local distributor.  
Here you find a list of our distributors worldwide.  
<https://www.wachendorff-automation.com/>



Wachendorff Automation GmbH & Co. KG  
Industriestrasse 7 • 65366 Geisenheim  
Germany

Phone: +49 67 22 / 99 65 25  
Fax: +49 67 22 / 99 65 70  
E-Mail: [wdg@wachendorff.de](mailto:wdg@wachendorff.de)  
[www.wachendorff-automation.de](http://www.wachendorff-automation.de)

