



# Online Data Sheet

## Encoder WDGP 36A


[www.wachendorff-automation.com/wdgp36a](http://www.wachendorff-automation.com/wdgp36a)

### Wachendorff Automation

#### ... systems and encoders

- Complete systems
- Industrial rugged encoders to suit your application
- Standard range and customer versions
- Maximum permissible loads
- 48-hour express production
- Made in Germany
- Worldwide distributor network

# Encoder WDGP 36A (magnetic)



- Due to high quality electronics any number of pulses up to 16384
- Protection class IP67, at shaft input IP65
- High output frequency up to 1 MHz
- Reverse polarity protection and short-circuit protection at 4.75 VDC to 32 VDC

[www.wachendorff-automation.com/wdgp36a](http://www.wachendorff-automation.com/wdgp36a)

| Resolution                |                       |
|---------------------------|-----------------------|
| Pulses per revolution PPR | 1 PPR up to 16384 PPR |

| Mechanical Data |                 |
|-----------------|-----------------|
| Housing         |                 |
| Flange          | servo flange    |
| Flange material | aluminum        |
| Housing cap     | stainless steel |
| Housing         | Ø 36 mm         |

| Shaft(s)        |  |
|-----------------|--|
| Shaft material  | stainless steel                        |
| Starting torque | approx. 0.3 Ncm at ambient temperature |

|                                       |            |
|---------------------------------------|------------|
| Shaft                                 | Ø 6 mm     |
| Shaft length                          | L: 11.5 mm |
| Max. Permissible shaft loading radial | 80 N       |
| Max. Permissible shaft loading axial  | 50 N       |

|                                       |                   |
|---------------------------------------|-------------------|
| Shaft                                 | Ø 6.35 mm, Ø 1/4" |
| Shaft length                          | L: 11.5 mm        |
| Max. Permissible shaft loading radial | 80 N              |
| Max. Permissible shaft loading axial  | 50 N              |

|                                       |          |
|---------------------------------------|----------|
| Shaft                                 | Ø 8 mm   |
| Shaft length                          | L: 18 mm |
| Max. Permissible shaft loading radial | 50 N     |
| Max. Permissible shaft loading axial  | 50 N     |

| Bearings              |  |
|-----------------------|--|
| Bearings type         | 2 precision ball bearings  |
| Nominale service life | 1.4 x 10 <sup>8</sup> revs. at 100 % rated shaft load<br>2 x 10 <sup>9</sup> revs. at 40 % rated shaft load<br>1.7 x 10 <sup>10</sup> revs. at 20 % rated shaft load |
| Max. operating speed  | 12000 rpm  |

| Machinery Directive: basic data safety integrity level |        |
|--|--------|
| MTTF <sub>d</sub>                                      | 1200 a |
| Mission time (TM)                                      | 25 a   |

|                              |   |
|------------------------------|---|
| Nominale service life (L10h) | 1.7 x 10 <sup>10</sup> revs. at 20 % rated shaft load and 12000 rpm |
| Diagnostic coverage (DC)     | 0 %   |

| Electrical Data                  |  |
|----------------------------------|--|
| Power supply/Current consumption | 4,75 VDC up to 32 VDC: typ. 80 mA                                    |
| Output circuit                   | HTL<br>HTL, inv.<br>TTL<br>TTL, RS422 compatible, inv.               |
| Pulse frequency                  | HTL up to 16384 ppr: max. 600 kHz<br>TTL up to 16384 ppr: max. 1 MHz |
| Channels                         | ABN<br>and inverted signals  |
| Load                             | max. 40 mA / channel   |
| Circuit protection               | inverse-polarity and short-circuit protection                        |
| Set zero pulse:                  | Set: SET = +UB for 2 s<br>Deactivate: SET = GND                      |

| Accuracy           |   |
|--------------------|---|
| Phase offset       | 90° ± max. 8.5 % of the period duration |
| pulse-/pause-ratio | 50 % ± max. 7 %                         |

| Environmental data               |   |
|----------------------------------|---|
| ESD (DIN EN 61000-4-2):          | 8 kV                                      |
| Burst (DIN EN 61000-4-4):        | 2 kV                                      |
| includes EMC:                    | DIN EN 61000-6-2<br>DIN EN 61000-6-3      |
| Vibration:<br>(DIN EN 60068-2-6) | 50 m/s <sup>2</sup> (10 Hz up to 2000 Hz) |
| Shock:<br>(DIN EN 60068-2-27)    | 1000 m/s <sup>2</sup> (6 ms)              |
| Design:                          | According DIN VDE 0160                    |

| Duty information       |          |
|------------------------|----------|
| Customs tariff number: | 90318020 |
| Country of origin:     | Germany  |

| General Data |                           |
|--------------|---------------------------|
| Weight       | approx. 130 g             |
| Connections  | cable or connector outlet |

---

|                              |  |
|------------------------------|--|
| Protection rating (EN 60529) | Housing: IP65, IP67;<br>shaft sealed: IP65;<br>cable outlet K1: IP40 |
| Operating temperature        | Connector: -40 °C up to +85 °C,<br>cable: -20 °C up to +80 °C        |
| Storage temperature          | Connector: -40 °C up to +100 °C,<br>cable: -30 °C up to +80 °C       |

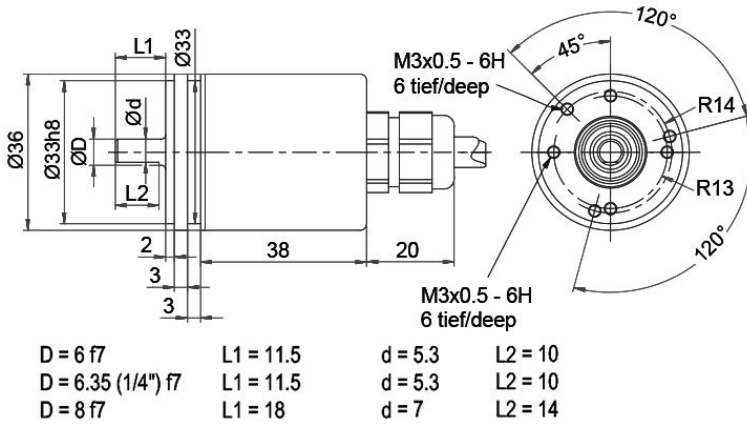
---

#### More Information

General technical data and safety instructions  
<http://www.wachendorff-automation.com/gtd>

Options  
<http://www.wachendorff-automation.com/acc>

---

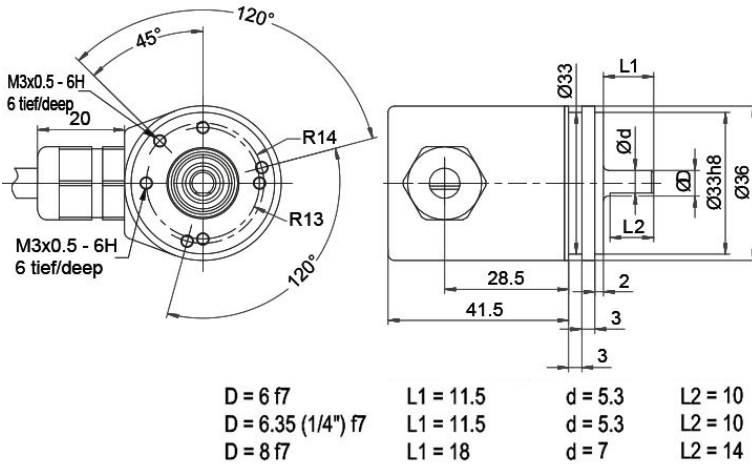
**Cable connection L2 axial with 2 m cable**

**Description**

ABN inv. poss.

L2 axial, shield connected to encoder housing

•

| Assignments    |          |          |          |          |
|----------------|----------|----------|----------|----------|
|                | L2       | L2       | L2       | L2       |
| <b>Circuit</b> | M11, M12 | M13, M14 | N11, N12 | N13, N14 |
| <b>GND</b>     | WH       | WH       | WH       | WH       |
| <b>(+) Vcc</b> | BN       | BN       | BN       | BN       |
| <b>A</b>       | GN       | GN       | GN       | GN       |
| <b>B</b>       | YE       | YE       | YE       | YE       |
| <b>N</b>       | GY       | GY       | GY       | GY       |
| <b>SET</b>     | -        | PK       | -        | PK       |
| <b>A inv.</b>  | RD       | RD       | -        | -        |
| <b>B inv.</b>  | BK       | BK       | -        | -        |
| <b>N inv.</b>  | VT       | VT       | -        | -        |
| <b>Shield</b>  | flex     | flex     | flex     | flex     |

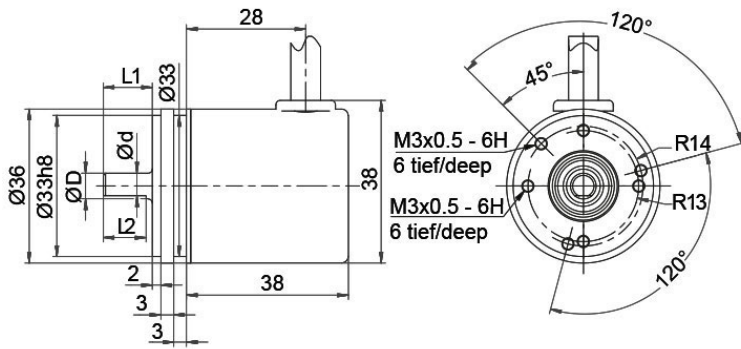
**Cable connection L3 radial with 2 m cabel**

**Description**

ABN inv. poss.

L3 radial, shield connected to encoder housing

•

| Assignments    |          |          |          |          |
|----------------|----------|----------|----------|----------|
|                | L3       | L3       | L3       | L3       |
| <b>Circuit</b> | M11, M12 | M13, M14 | N11, N12 | N13, N14 |
| <b>GND</b>     | WH       | WH       | WH       | WH       |
| <b>(+) Vcc</b> | BN       | BN       | BN       | BN       |
| <b>A</b>       | GN       | GN       | GN       | GN       |
| <b>B</b>       | YE       | YE       | YE       | YE       |
| <b>N</b>       | GY       | GY       | GY       | GY       |
| <b>SET</b>     | -        | PK       | -        | PK       |
| <b>A inv.</b>  | RD       | RD       | -        | -        |
| <b>B inv.</b>  | BK       | BK       | -        | -        |
| <b>N inv.</b>  | VT       | VT       | -        | -        |
| <b>Shield</b>  | flex     | flex     | flex     | flex     |

**Cable K1 (IP40) radial with 2 m cable**


|                    |           |         |         |
|--------------------|-----------|---------|---------|
| D = 6 f7           | L1 = 11.5 | d = 5.3 | L2 = 10 |
| D = 6.35 (1/4") f7 | L1 = 11.5 | d = 5.3 | L2 = 10 |
| D = 8 f7           | L1 = 18   | d = 7   | L2 = 14 |

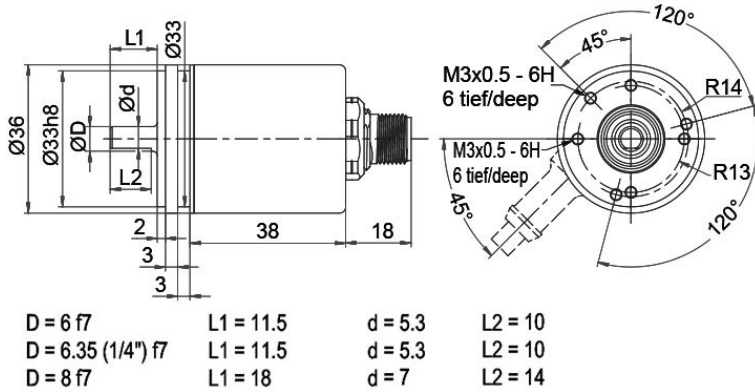
**Description**

ABN inv. poss.




K1 radial, shield not connected (IP40)

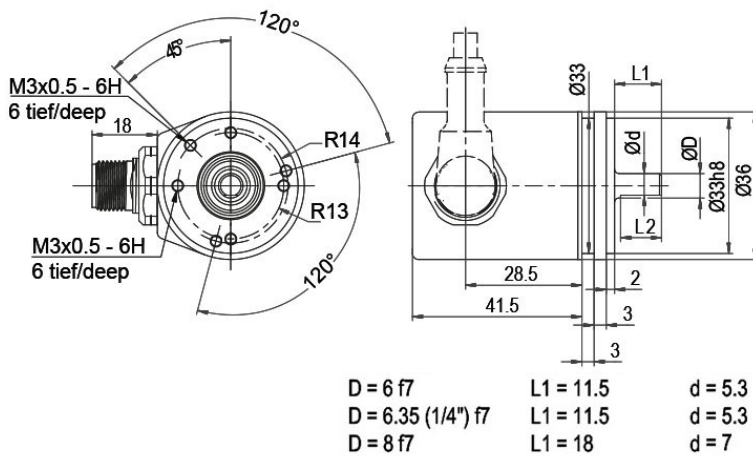
•

| Assignments    |          |          |          |          |
|----------------|----------|----------|----------|----------|
|                | K1       | K1       | K1       | K1       |
| <b>Circuit</b> | M11, M12 | M13, M14 | N11, N12 | N13, N14 |
| <b>GND</b>     | WH       | WH       | WH       | WH       |
| <b>(+) Vcc</b> | BN       | BN       | BN       | BN       |
| <b>A</b>       | GN       | GN       | GN       | GN       |
| <b>B</b>       | YE       | YE       | YE       | YE       |
| <b>N</b>       | GY       | GY       | GY       | GY       |
| <b>SET</b>     | -        | PK       | -        | PK       |
| <b>A inv.</b>  | RD       | RD       | -        | -        |
| <b>B inv.</b>  | BK       | BK       | -        | -        |
| <b>N inv.</b>  | VT       | VT       | -        | -        |
| <b>Shield</b>  | flex     | flex     | flex     | flex     |

**Sensor connector (M12x1) SB axial, 5-, 8-, 12-pin**





| Description   | ABN inv. poss. |
|---|----------------|
| <b>SB5</b> axial, 5-pin, Connector connected to encoder housing   | -              |
| <b>SB8</b> axial, 8-pin, Connector connected to encoder housing   | •              |
| <b>SB12</b> axial, 12-pin, Connector connected to encoder housing | •              |

| Assignments    |   |   |   |
|----------------|---|---|---|
|                | SB5   | SB8   | SB12  |
|                | 5-pin   | 8-pin   | 12-pin  |
|                |  |  |  |
| <b>Circuit</b> | N11, N12  | M11, M12  | M13, M14  |
| <b>GND</b>     | 3   | 1   | 3   |
| <b>(+) Vcc</b> | 1   | 2   | 1   |
| <b>A</b>       | 4   | 3   | 4   |
| <b>B</b>       | 2   | 4   | 6   |
| <b>N</b>       | 5   | 5   | 8   |
| <b>SET</b>     | -   | -   | 5   |
| <b>A inv.</b>  | -   | 6   | 9   |
| <b>B inv.</b>  | -   | 7   | 7   |
| <b>N inv.</b>  | -   | 8   | 10  |
| <b>n. c.</b>   | -   | -   | 2, 11, 12   |
| <b>Shield</b>  | -   | -   | -   |

**Sensor-connector (M12x1) SC radial, 5-, 8-, 12 polig**

**Description**
**ABN inv. poss.**

|             |  |   |
|-------------|--|---|
| <b>SC5</b>  | radial, 5-pin, Connector connected to encoder housing  | - |
| <b>SC8</b>  | radial, 8-pin, Connector connected to encoder housing  | • |
| <b>SC12</b> | radial, 12-pin, Connector connected to encoder housing | • |

**Assignments**

|                | <b>SC5</b>  | <b>SC8</b>  | <b>SC12</b>   |
|----------------|---|---|---|
|                | <b>5-pin</b>  | <b>8-pin</b>  | <b>12-pin</b>   |
|                |  |  |  |
| <b>Circuit</b> | N11, N12  | M11, M12  | M13, M14  |
| <b>GND</b>     | 3   | 1   | 3   |
| <b>(+) Vcc</b> | 1   | 2   | 1   |
| <b>A</b>       | 4   | 3   | 4   |
| <b>B</b>       | 2   | 4   | 6   |
| <b>N</b>       | 5   | 5   | 8   |
| <b>SET</b>     | -   | -   | 5   |
| <b>A inv.</b>  | -   | 6   | 9   |
| <b>B inv.</b>  | -   | 7   | 7   |
| <b>N inv.</b>  | -   | 8   | 10  |
| <b>n. c.</b>   | -   | -   | 2, 11, 12   |
| <b>Shield</b>  | -   | -   | -   |



## Options

### Cable length

### Order key

The encoder WDGP 36A can be supplied with more than 2 m cable. The maximum cable length depends on the supply voltage and the frequency; see [www.wachendorff-automation.com/atd](http://www.wachendorff-automation.com/atd)

**XXX = Decimeter**

Please extend the standard order code with a three figure number, specifying the cable length in decimetres.

Example: 5 m cable = 050

| Example Order No.                       | Type  |                         |  |                              | Your encoder     |
|---|---|-------------------------|--|------------------------------|------------------|
| WDGP 36A                                | WDGP 36A  |                         |  |                              | WDGP 36A         |
|   | <b>Shaft</b>  |                         |  |                              |                  |
| 06                                      | 06; 2Z= Ø 6.35 mm, Ø 1/4"; 08                           |                         |  |                              |                  |
|   | <b>Pulses per revolution PPR:</b>                       |                         |  |                              |                  |
| 16384                                   | 1-16384<br>Other PPRs on request                        |                         |  |                              |                  |
|   | <b>Channels:</b>  |                         |  |                              |                  |
| ABN                                     | ABN   |                         |  |                              |                  |
|   | <b>Output circuit</b>                                   |                         |  |                              |                  |
| M13                                     | <b>Resolution PPR</b>                                   | <b>Power supply VDC</b> | <b>Output circuit</b>                      | <b>Light reserve warning</b> | <b>Order key</b> |
|   | 1-16384   | 4.75 - 32               | HTL inverted                               | -                            | M11              |
|   |   | 4.75 - 32               | TTL, RS422 comp., inverted                 | -                            | M12              |
|   |   | 4.75 - 32               | HTL, inv. set zero pulse                   | -                            | M13              |
|   |   | 4.75 - 32               | TTL, RS422 compatible, inv. set zero pulse | -                            | M14              |
|   |   | 4.75 - 32               | HTL  | -                            | N11              |
|   |   | 4.75 - 32               | TTL  | -                            | N12              |
|   |   | 4.75 - 32               | HTL set zero pulse                         | -                            | N13              |
| 4.75 - 32                               |   | TTL set zero pulse      | -  | N14                          |                  |
|   | <b>Electrical connections</b>                           |                         |  |                              |                  |
| L2                                      | <b>Description</b>                                      |                         |  | <b>ABN inv. poss.</b>        | <b>Order key</b> |
|   | <b>Cable: length (2 m standard, WDG 58T: 1 m)</b>       |                         |  |                              |                  |
|   | radial, shield not connected (IP40)                     |                         |  | •                            | K1               |
|   | axial, shield connected to encoder housing              |                         |  | •                            | L2               |
|   | radial, shield connected to encoder housing             |                         |  | •                            | L3               |
|   | <b>Connector: (shield connected to encoder housing)</b> |                         |  |                              |                  |
|   | sensor-connector, M12x1, 5-pin, axial                   |                         |  | -                            | SB5              |
|   | sensor-connector, M12x1, 5-pin, radial                  |                         |  | -                            | SC5              |
|   | sensor-connector, M12x1, 8-pin, axial                   |                         |  | •                            | SB8              |
|   | sensor-connector, M12x1, 8-pin, radial                  |                         |  | •                            | SC8              |
|   | sensor-connector, M12x1, 12-pin, axial                  |                         |  | •                            | SB12             |
| sensor-connector, M12x1, 12-pin, radial |   |                         | •  | SC12                         |                  |
|   | <b>Options</b>  |                         |  |                              |                  |
|   | <b>Description</b>                                      |                         |  | <b>Order key</b>             |                  |
|   | Without option  |                         |  | Empty                        |                  |
|   | Cable length  |                         |  | XXX = Decimeter              |                  |

|                           |          |    |       |     |     |    |  |          |  |  |  |  |  |                     |
|---------------------------|----------|----|-------|-----|-----|----|--|----------|--|--|--|--|--|---------------------|
| <b>Example Order No.=</b> | WDGP 36A | 06 | 16384 | ABN | M13 | L2 |  | WDGP 36A |  |  |  |  |  | <b>Your encoder</b> |
|---------------------------|----------|----|-------|-----|-----|----|--|----------|--|--|--|--|--|---------------------|



For further information please contact our local distributor.  
Here you find a list of our distributors worldwide.  
<https://www.wachendorff-automation.com/contact-sales-en/>



Wachendorff Automation GmbH & Co. KG  
Industriestrasse 7 • 65366 Geisenheim  
Germany

Phone: +49 67 22 / 99 65 25  
E-Mail: [wdg@wachendorff.de](mailto:wdg@wachendorff.de)  
[www.wachendorff-automation.de](http://www.wachendorff-automation.de)

