



Online Data Sheet

Encoder WDG 145H

www.wachendorff-automation.com/wdg145h

Wachendorff Automation

... systems and encoders

- Complete systems
- Industrial rugged encoders to suit your application
- Standard range and customer versions
- Maximum permissible loads
- 48-hour express production
- Made in Germany
- Worldwide distributor network

Encoder WDG 145H (optical)



- Thru-bore encoder for direct installation on large electric motors
- Maximum mechanical and electrical safety
- Highly interference-resistant when used with frequency converters
- Meets protection class IP5, optional IP64
- Full connection protection with 10 VDC up to 30 VDC
- With light reserve warning

www.wachendorff-automation.com/wdg145h

Resolution	
Pulses per revolution PPR	up to 2500 PPR
Mechanical Data	
Housing	
Flange	hollow shaft (through-bored)
Flange material	aluminum
Housing cap	aluminum
Torque supports	incl. 3 torque supports WDGDS10001
- 1. Spring plate compensation	axial: ± 0.8 mm, radial: ± 0.2 mm
- 2. Cylinder pin 4 mm	needs accessories WDGDS10005
- Compensation	axial: ± 0.5 mm, radial: ± 1.5 mm, Max. operating speed: 800 rpm
Housing	$\varnothing$ 145 mm
Shaft(s)	
Shaft material	stainless steel
Starting torque	approx. 1.5 Ncm at ambient temperature
Fixing	permanently attached clamping ring
Shaft	$\varnothing$ 45 mm
Shaft length	L: 59 mm
Insertion depth min.	69 mm
Max. Permissible shaft loading radial	200 N
Max. Permissible shaft loading axial	100 N
Shaft	$\varnothing$ 48 mm
Shaft length	L: 59 mm
Insertion depth min.	69 mm
Max. Permissible shaft loading radial	200 N
Max. Permissible shaft loading axial	100 N
Shaft	$\varnothing$ 50 mm
Shaft length	L: 59 mm
Insertion depth min.	69 mm
Max. Permissible shaft loading radial	200 N
Max. Permissible shaft loading axial	100 N
Shaft	$\varnothing$ 55 mm

Shaft length	L: 59 mm
Insertion depth min.	69 mm
Max. Permissible shaft loading radial	200 N
Max. Permissible shaft loading axial	100 N
Shaft	$\varnothing$ 60 mm
Shaft length	L: 59 mm
Insertion depth min.	69 mm
Max. Permissible shaft loading radial	200 N
Max. Permissible shaft loading axial	100 N
Shaft	$\varnothing$ 65 mm
Shaft length	L: 59 mm
Insertion depth min.	69 mm
Max. Permissible shaft loading radial	200 N
Max. Permissible shaft loading axial	100 N
Shaft	$\varnothing$ 72 mm
Shaft length	L: 59 mm
Insertion depth min.	69 mm
Max. Permissible shaft loading radial	200 N
Max. Permissible shaft loading axial	100 N
Bearings	
Bearings type	2 precision ball bearings
Nominal service life	3 x 10 ¹⁰ revs. at 100 % rated shaft load 4 x 10 ¹¹ revs. at 40 % rated shaft load 3 x 10 ¹² revs. at 20 % rated shaft load
Max. operating speed	1600 min ⁻¹ (with cylinder pin 800 min ⁻¹)
Machinery Directive: basic data safety integrity level	
MTTF _d	200 a
Mission time (TM)	25 a
Nominal service life (L10h)	3 x 10 ¹² revs. at 20 % rated shaft load and 1600 min ⁻¹ (with cylinder pin 800 min ⁻¹)
Diagnostic coverage (DC)	0 %

Electrical Data	
Power supply/Current consumption	4,75 VDC up to 5,5 VDC: typ. 70 mA
Power supply/Current consumption	10 VDC up to 30 VDC: typ. 70 mA
Output circuit	TTL TTL, RS422 compatible, inv. HTL HTL, inv.
Pulse frequency	TTL ≤ 2500 ppr: max. 200 kHz HTL ≤ 2500 ppr: max. 200 kHz
Channels	AB ABN and inverted signals
Load	max. 40 mA / channel
Circuit protection	circuit type G24, H24, I24, R24 only

Accuracy	
Phase offset	90° $\pm$ max. 7.5 % of the period duration
pulse-/pause-ratio	50 % $\pm$ max. 7 %


Environmental data	
ESD (DIN EN 61000-4-2):	8 kV
Burst (DIN EN 61000-4-4):	2 kV
includes EMC:	DIN EN 61000-6-2 DIN EN 61000-6-3
Vibration: (DIN EN 60068-2-6)	50 m/s ² (10 Hz up to 2000 Hz)
Shock: (DIN EN 60068-2-27)	1000 m/s ² (6 ms)
Design:	according DIN VDE 0160

Duty information	
Customs tariff number:	90318020
Country of origin:	Germany

General Data	
Weight	approx. 1700 g up to 2500 g
Connections	cable or connector, radial
Protection rating (EN 60529)	IP54
Operating temperature	-20 °C up to +80 °C
Storage temperature	-30 °C up to +80 °C

More Information	
General technical data and safety instructions http://www.wachendorff-automation.com/gtd	
Options http://www.wachendorff-automation.com/acc	

Cable connection K3, L3 with 2 m cable

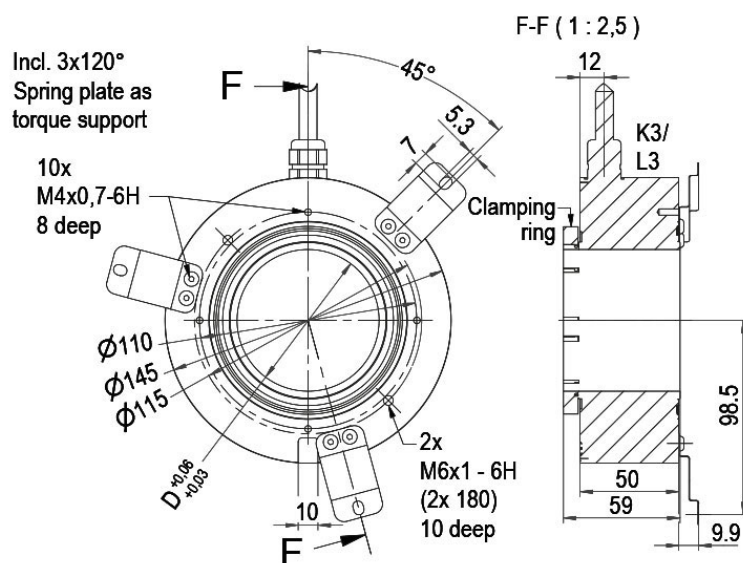

Description

ABN inv. poss.

K3 radial, shield not connected


•

L3 radial, shield connected to encoder housing

•

Assignments				
	K3, L3	K3, L3	K3, L3	K3, L3
Circuit	G05, G24	H05, H24	I05, I24	R05, R24
GND	WH	WH	WH	WH
(+) Vcc	BN	BN	BN	BN
A	GN	GN	GN	GN
B	YE	YE	YE	YE
N	GY	GY	GY	GY
Light reserve warning	PK	-	PK	-
A inv.	-	-	RD	RD
B inv.	-	-	BK, (BU at ACA)	BK, (BU at ACA)
N inv.	-	-	VT	VT
Shield	flex	flex	flex	flex

Connector (M16x0.75) SH, 5-, 6-, 8-, 12-pin

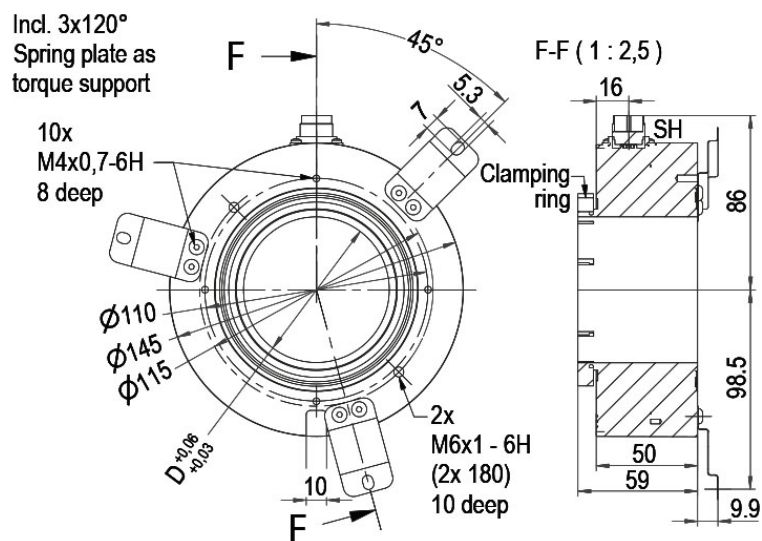

Description


ABN inv. poss.

SH5	radial, 5-pin, Connector connected to encoder housing	-
SH6	radial, 6-pin, Connector connected to encoder housing	-
SH8	radial, 8-pin, Connector connected to encoder housing	•
SH12	radial, 12-pin, Connector connected to encoder housing	•

Assignments

	SH5	SH6	SH6	SH8	SH8	SH12	SH12	SH12	SH12
	5-pin	6-pin	6-pin	8-pin	8-pin	12-pin	12-pin	12-pin	12-pin
Circuit	H05, H24	G05, G24	H05, H24	H05, H24	R05, R24	G05, G24	H05, H24	I05, I24	R05, R24
GND	1	6	6	1	1	K, L	K, L	K, L	K, L
(+) Vcc	2	1	1	2	2	M, B	M, B	M, B	M, B
A	3	2	2	3	3	E	E	E	E
B	4	4	4	4	4	H	H	H	H
N	5	3	3	5	5	C	C	C	C
Light reserve warning	-	5	-	-	-	G	-	G	-
A inv.	-	-	-	-	6	-	-	F	F
B inv.	-	-	-	-	7	-	-	A	A
N inv.	-	-	-	-	8	-	-	D	D
n. c.	-	-	5	6, 7, 8	-	A, D, F, J	A, D, F, G, J	J	G, J
Shield	-	-	-	-	-	-	-	-	-

Connector (M16x0.75) S3, 7-pin

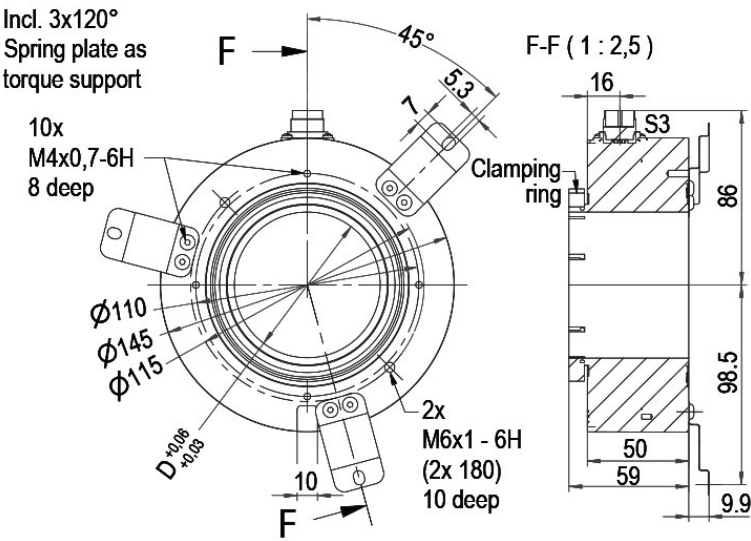

Description


ABN inv. poss.

S3 radial, 7-pin, Connector connected to encoder housing

-

Assignments		
	S3 7-pin	S3 7-pin
Circuit	G05, G24	H05, H24
GND	1	1
(+) Vcc	2	2
A	3	3
B	4	4
N	5	5
Light reserve warning	6	-
A inv.	-	-
B inv.	-	-
N inv.	-	-
n. c.	7	6, 7
Shield	-	-

Connector (M23) S5R, 12-pin (clockwise)

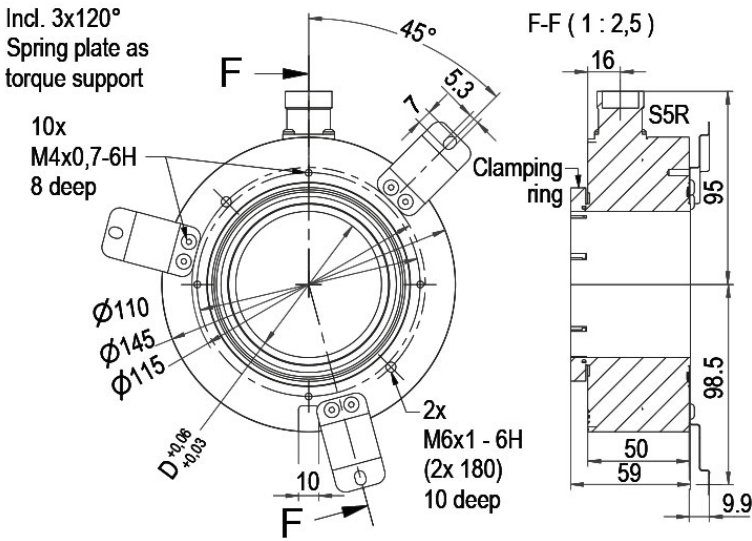

Description	ABN inv. poss.
S5R radial, 12-pin, Connector connected to encoder housing	•

Assignments				
	S5R 12-pin	S5R 12-pin	S5R 12-pin	S5R 12-pin
Circuit	G05, G24	H05, H24	I05, I24	R05, R24
GND	10	10	10	10
(+) Vcc	12	12	12	12
A	5	5	5	5
B	8	8	8	8
N	3	3	3	3
Light reserve warning	11	-	11	-
A inv.	-	-	6	6
B inv.	-	-	1	1
N inv.	-	-	4	4
n. c.	1, 2, 4, 6, 7, 9	1, 2, 4, 6, 7, 9, 11	2, 7, 9	2, 7, 9, 11
Shield	-	-	-	-

Options

IP64 all around

The encoder WDG 145H can be supplied in a full IP64 version.

Order key

AEK

Max. RPM: 500 rpm

Starting-torque: approx. 5 Ncm at ambient temperature, approx. 1.416 in-ozf at ambient temperature

Cable length

The encoder WDG 145H can be supplied with more than 2 m cable. The maximum cable length depends on the supply voltage and the frequency; see www.wachendorff-automation.com/atd

Please extend the standard order code with a three figure number, specifying the cable length in decimetres.

Example: 5 m cable = 050

Order key

XXX = Decimeter

Example Order No.	Type					Your encoder
WDG 145H	WDG 145H					WDG 145H
		Bore size				
65	45; 48; 50; 55; 60; 65; 72					
		Pulses per revolution PPR:				
1024	1024, 2500 Other PPRs on request					
		Channels:				
ABN	AB, ABN					
		Output circuit				
G24	Resolution PPR	Power supply VDC	Output circuit	Light reserve warning	Order key	
	1024, 2500	4.75 - 5.5	TTL	•	G05	
		4.75 - 5.5	TTL	-	H05	
		4.75 - 5.5	TTL, RS422 comp., inverted	•	I05	
		4.75 - 5.5	TTL, RS422 comp., inverted	-	R05	
		10 - 30	HTL	•	G24	
		10 - 30	HTL	-	H24	
		10 - 30	HTL inverted	•	I24	
10 - 30		HTL inverted	-	R24		
		Electrical connections				
K3	Description			ABN inv. poss.	Order key	
	Cable: length (2 m standard, WDG 58T: 1 m)					
	radial, shield not connected			•	K3	
	radial, shield connected to encoder housing			•	L3	
	Connector: (shield connected to encoder housing)					
	connector, M16x0.75, 5-pin, radial			-	SH5	
	connector, M16x0.75, 6-pin, radial			-	SH6	
	connector, M16x0.75, 8-pin, radial			•	SH8	
	connector, M16x0.75, 12-pin, radial			•	SH12	
	connector, M16x0.75, 7-pin, radial			-	S3	
	connector, M23, 12-pin, radial			•	S5	
	connector, clockwise pin count, M23, 12-pin, radial			•	S5R	
	sensor-connector, M12x1, 4-pin, radial			-	SC4	
	sensor-connector, M12x1, 5-pin, radial			-	SC5	
	sensor-connector, M12x1, 8-pin, radial			•	SC8	
	sensor-connector, M12x1, 12-pin, radial			•	SC12	
		Options				
	Description			Order key		
	IP64			AEK		
	Without option			Empty		
	Cable length			XXX = Decimeter		

Example Order No. =	WDG 145H	65	1024	ABN	G24	K3		WDG 145H							Your encoder
---------------------	----------	----	------	-----	-----	----	--	----------	--	--	--	--	--	--	--------------



For further information please contact our local distributor.
Here you find a list of our distributors worldwide.
<https://www.wachendorff-automation.com/contact-sales-en/>



Wachendorff Automation GmbH & Co. KG
Industriestrasse 7 • 65366 Geisenheim
Germany

Phone: +49 67 22 / 99 65 25
E-Mail: wdg@wachendorff.de
www.wachendorff-automation.de

