



# Online Data Sheet

## Encoder WDGA 36E RS485

[www.wachendorff-automation.com/wdga36ers485](http://www.wachendorff-automation.com/wdga36ers485)

### Wachendorff Automation

#### ... systems and encoders

- Complete systems
- Industrial rugged encoders to suit your application
- Standard range and customer versions
- Maximum permissible loads
- 48-hour express production
- Made in Germany
- Worldwide distributor network

# Encoder WDGA 36E absolut RS485 magnetic, with EnDra® Technology


**EnDra®**  
Technologie

**RS485**

- EnDra® multiturn technology: maintenance-free and environmentally friendly
- RS485
- Single-turn/Multi-turn (max. 16 bit /32 bit)
- Forward-looking technology with 32 bit processor
- 2-colour-LED as indicator for operating condition
- CRC checksum

[www.wachendorff-automation.com/wdga36ers485](http://www.wachendorff-automation.com/wdga36ers485)

## Mechanical Data

| Housing                        |                                           |
|--------------------------------|-------------------------------------------|
| Flange                         | hollow shaft (blind-bored)                |
| Flange material                | aluminum                                  |
| Housing cap                    | stainless steel                           |
| - 1. Spring plate compensation | axial: $\pm 0.2$ mm, radial: $\pm 0.1$ mm |
| Housing                        | $\varnothing 36$ mm                       |

## Shaft(s)

|                                       |                                        |
|---------------------------------------|----------------------------------------|
| Starting torque                       | approx. 0.3 Ncm at ambient temperature |
| Shaft                                 | $\varnothing 6$ mm                     |
| Insertion depth min.                  | 8 mm                                   |
| Insertion depth max.                  | 17 mm                                  |
| Max. Permissible shaft loading radial | 80 N                                   |
| Max. Permissible shaft loading axial  | 50 N                                   |

|                                       |                                           |
|---------------------------------------|-------------------------------------------|
| Shaft                                 | $\varnothing 6.35$ mm, $\varnothing 1/4"$ |
| Insertion depth min.                  | 8 mm                                      |
| Insertion depth max.                  | 17 mm                                     |
| Max. Permissible shaft loading radial | 80 N                                      |
| Max. Permissible shaft loading axial  | 50 N                                      |

## Bearings

|                      |                                                                                                                                                                      |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Bearings type        | 2 precision ball bearings                                                                                                                                            |
| Nominal service life | 1.4 x 10 <sup>8</sup> revs. at 100 % rated shaft load<br>2 x 10 <sup>9</sup> revs. at 40 % rated shaft load<br>1.7 x 10 <sup>10</sup> revs. at 20 % rated shaft load |
| Max. operating speed | 12000 rpm                                                                                                                                                            |

## Machinery Directive: basic data safety integrity level

|                             |                                                                     |
|-----------------------------|---------------------------------------------------------------------|
| MTTF <sub>d</sub>           | 1000 a                                                              |
| Mission time (TM)           | 20 a                                                                |
| Nominal service life (L10h) | 1.7 x 10 <sup>10</sup> revs. at 20 % rated shaft load and 12000 rpm |
| Diagnostic coverage (DC)    | 0 %                                                                 |

## Electrical Data

|                                  |                                   |
|----------------------------------|-----------------------------------|
| Power supply/Current consumption | 4,75 VDC up to 32 VDC: typ. 50 mA |
| Power consumption                | max. 0.5 W                        |

|                                  |                                    |
|----------------------------------|------------------------------------|
| Power supply/Current consumption | 4,75 VDC up to 5,5 VDC: typ. 80 mA |
| Power consumption                | max. 0.44 W                        |

## Sensor data

|                             |                                                |
|-----------------------------|------------------------------------------------|
| Single-turn technology      | innovative hall sensor technology              |
| Single-turn resolution      | up to 65,536 steps/360° (16 bit)               |
| Single-turn accuracy        | $\pm 0.0878^\circ$ ( $\leq 12$ bit)            |
| Single-turn repeat accuracy | $\pm 0.0878^\circ$ ( $\leq 12$ bit)            |
| Internal cycle time         | $\leq 600$ $\mu$ s                             |
| Multi-turn technology       | patented EnDra® technology no battery no gear. |
| Multi-turn resolution       | up to 32 bit.                                  |

## Environmental data

|                               |                                                        |
|-------------------------------|--------------------------------------------------------|
| ESD (DIN EN 61000-4-2):       | 8 kV                                                   |
| Burst (DIN EN 61000-4-4):     | 2 kV                                                   |
| includes EMC:                 | DIN EN 61000-6-2<br>DIN EN 61000-6-3<br>DIN EN 61326-1 |
| Vibration: (DIN EN 60068-2-6) | 300 m/s <sup>2</sup> (10 Hz up to 2000 Hz)             |
| Shock: (DIN EN 60068-2-27)    | 5000 m/s <sup>2</sup> (6 ms)                           |
| Design:                       | according DIN VDE 0160                                 |
| Turn on time:                 | <1,5 s                                                 |

## Duty information


|                        |          |
|------------------------|----------|
| Customs tariff number: | 90318020 |
| Country of origin:     | Germany  |

## Interface

|                                                 |                                                                           |
|-------------------------------------------------|---------------------------------------------------------------------------|
| Interface:                                      | <b>RS485</b>                                                              |
| Configuration inputs:                           |                                                                           |
| Positive direction of counting: (View on shaft) | DIR = GND -> cw<br>DIR = +Ub -> ccw                                       |
| Set to zero:                                    | Preset = apply +Ub for 2 s                                                |
| Baud rate:                                      | Standard: 9600 bit/s<br>Other baud rates on request                       |
| Polling cycle:                                  | Standard: 20 ms (Tolerances: +/- 2 ms)<br>Other polling cycles on request |
| Telegram length:                                | 6 byte singleturn, 8 byte multiturn                                       |

|                                 |                                                                                                                                                                                                                                                                                                        |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Telegram composition:           | 2 Byte Präambel, 2 / 4 Byte user data, 2 Byte CRC                                                                                                                                                                                                                                                      |
| Bytecomposition:                | Startbit (0) and Stopbit (1), Bytes are Big-Endian and LSB first, no Paritybit                                                                                                                                                                                                                         |
| CRC-Definition:                 | Code: <ul style="list-style-type: none"> <li>• CRC-CCITT 16 bit (<math>X^{16}+X^{12}+X^5+1</math>)</li> <li>• Startvalue 0x1021,</li> <li>• Start/Stopbits aren't included</li> <li>• Präambel (0xABCD) is included,</li> <li>• Byte-wise orientation: per CRC-Refresh there is used 1 Byte</li> </ul> |
| Protocol malfunction behaviour: | If encoder recognizes that it's impossible to send a right positionvalue (e.G.: Magnet-loss), there will be send out a telegram with maximum value user Data at normal cycle time and normal Baudrate.                                                                                                 |

#### Protocol RS485

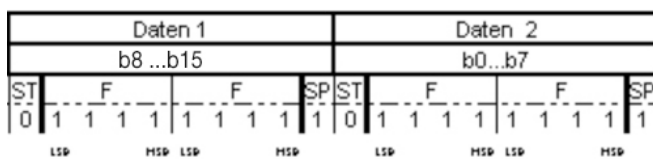


#### General Data

|                              |                                                                      |
|------------------------------|----------------------------------------------------------------------|
| Weight                       | approx. 110 g                                                        |
| Connections                  | cable or connector outlet                                            |
| Protection rating (EN 60529) | Housing: IP65, IP67;<br>shaft sealed: IP65;<br>cable outlet K1: IP40 |
| Operating temperature        | -40 °C up to +85 °C                                                  |
| Storage temperature          | -40 °C up to +100 °C                                                 |

#### More Information

General technical data and safety instructions  
<http://www.wachendorff-automation.com/gtd>  
Options  
<http://www.wachendorff-automation.com/acc>

## Cable connection L2 axial with 2 m cable

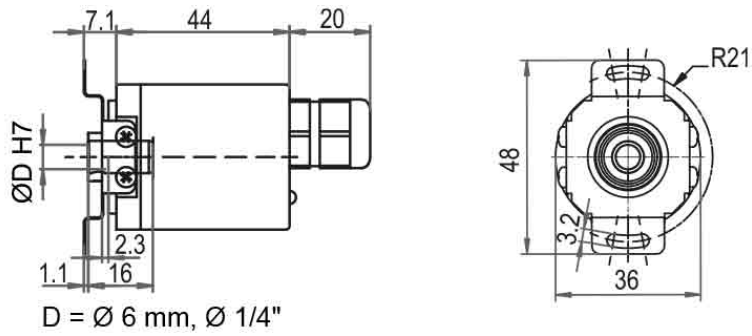


### Description

**L2** axial, shield connected to encoder housing

| Assignments      |           |
|------------------|-----------|
|                  | <b>L2</b> |
| <b>S- (GND)</b>  | WH        |
| <b>S+ (DCin)</b> | BN        |
| <b>A (DATA+)</b> | GY        |
| <b>B (DATA-)</b> | PK        |
| <b>PRESET</b>    | BU        |
| <b>DIR</b>       | RD        |
| <b>Shield</b>    | housing   |



**Cable connection, K1 radial with 2 m cable, IP40**

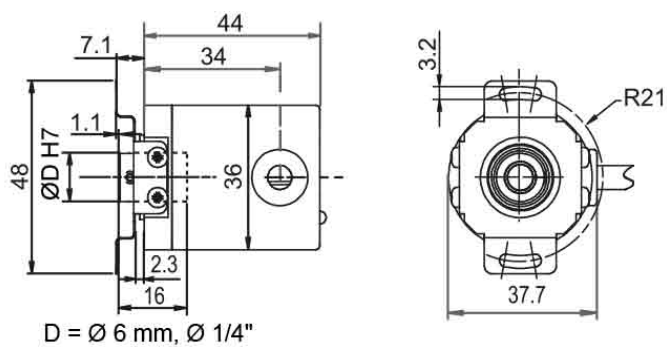


**Description**

**K1** radial, shield not connected

| Assignments      |               |
|------------------|---------------|
|                  | <b>K1</b>     |
| <b>S- (GND)</b>  | WH            |
| <b>S+ (DCin)</b> | BN            |
| <b>A (DATA+)</b> | GY            |
| <b>B (DATA-)</b> | PK            |
| <b>PRESET</b>    | BU            |
| <b>DIR</b>       | RD            |
| <b>Shield</b>    | housing n. c. |




Connector, M12x1, CC8 radial, 8-pin

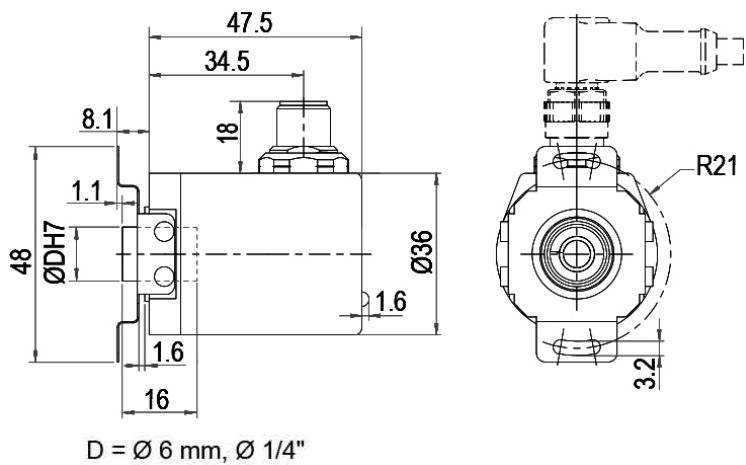

Description

CC8 radial, 8-pin, shield connected to encoder housing

| Assignments |                                                                                                              |
|-------------|--------------------------------------------------------------------------------------------------------------|
|             | <div><div>CC8</div></div> |
| S- (GND)    | 1                                                                                                            |
| S+ (DCin)   | 2                                                                                                            |
| A (DATA+)   | 5                                                                                                            |
| B (DATA-)   | 6                                                                                                            |
| PRESET      | 7                                                                                                            |
| DIR         | 8                                                                                                            |
| Shield      | housing                                                                                                      |



| Example Order No. | Type                                                                                                  | Your encoder     |    |
|-------------------|-------------------------------------------------------------------------------------------------------|------------------|----|
| WDGA 36E          | WDGA 36E                                                                                              | WDGA 36E         |    |
|                   | <b>Shaft</b>                                                                                          | <b>Order key</b> |    |
| 06                | Ø 6 mm                                                                                                | 06               |    |
|                   | Ø 6.35 mm Ø 1/4"                                                                                      | 2Z               |    |
|                   | <b>Single-turn Resolution</b>                                                                         | <b>Order key</b> |    |
| 14                | Single-turn resolution 1 bit up to 16 bit: (e. G. 14 bit)                                             | 14               |    |
|                   | <b>Multi-turn Resolution</b>                                                                          | <b>Order key</b> |    |
| 18                | Multi-turn up to 32 bit (e. G. 18 bit)<br>(Single-turn + Multi-turn max. 32 bit)<br>No Multi-turn: 00 | 18               |    |
|                   | <b>Data protocol</b>                                                                                  | <b>Order key</b> |    |
| EI                | RS485                                                                                                 | EI               | EI |
|                   | <b>Software</b>                                                                                       | <b>Order key</b> |    |
| A                 | up to date release                                                                                    | A                | A  |
|                   | <b>Code</b>                                                                                           | <b>Order key</b> |    |
| B                 | binary                                                                                                | B                | B  |
|                   | <b>Power supply</b>                                                                                   | <b>Order key</b> |    |
| 0                 | 4.75 V up to 32 V (standard)                                                                          | 0                |    |
|                   | 4.75 V up to 5.5 V                                                                                    | 1                |    |
|                   | <b>Galvanic isolation</b>                                                                             | <b>Order key</b> |    |
| 0                 | no                                                                                                    | 0                | 0  |
|                   | <b>Electrical connections</b>                                                                         | <b>Order key</b> |    |
| L2                | <b>Cable:</b>                                                                                         |                  |    |
|                   | axial, shield connected to encoder housing, with 2 m cable                                            | L2               |    |
|                   | radial, shield connected to encoder housing, with 2 m cable                                           | L3               |    |
|                   | radial, shield not connected, with 2 m cable, IP40                                                    | K1               |    |
|                   |                                                                                                       |                  |    |
|                   | <b>Connector:</b>                                                                                     |                  |    |
|                   | sensor-connector, M12x1, 8-pin, axial, shield connected to encoder housing                            | CB8              |    |
|                   | sensor-connector, M12x1, 8-pin, radial, shield connected to encoder housing                           | CC8              |    |

|                   |          |    |    |    |    |   |   |   |   |    |
|-------------------|----------|----|----|----|----|---|---|---|---|----|
| Example Order No. | WDGA 36E | 06 | 14 | 18 | EI | A | B | 0 | 0 | L2 |
|-------------------|----------|----|----|----|----|---|---|---|---|----|

|          |  |  |  |    |   |   |  |   |  |              |
|----------|--|--|--|----|---|---|--|---|--|--------------|
| WDGA 36E |  |  |  | EI | A | B |  | 0 |  | Your encoder |
|----------|--|--|--|----|---|---|--|---|--|--------------|



For further information please contact our local distributor.  
Here you find a list of our distributors worldwide.  
<https://www.wachendorff-automation.com/contact-sales-en/>



Wachendorff Automation GmbH & Co. KG  
Industriestrasse 7 • 65366 Geisenheim  
Germany

Phone: +49 67 22 / 99 65 25  
E-Mail: [wdg@wachendorff.de](mailto:wdg@wachendorff.de)  
[www.wachendorff-automation.de](http://www.wachendorff-automation.de)

