WACHENDORFF
The Encoder Experts

Online Data sheet

Encoder WDGA 50V IO-Link

www.wachendorff-automation.com/wdga50v-io-link

Wachendorff Automation

... systems and encoders

- Complete systems
- Industrial rugged encoders to suit your application
- Standard range and customer versions
- Maximum permissible loads
- 48-hour express production
- Made in Germany
- Worldwide distributor network

IndustrieROBUST

Encoder WDGA 50V absolute IO-Link, with EnDra®-Technology

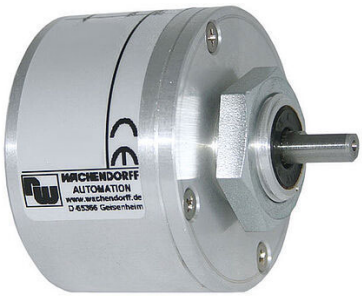

Illustration similar

EnDra® Technologie

IO-Link

- EnDra®: maintenance-free and environmentally friendly
- IO-Link, Single-turn and Multi-turn
- Device Profile for encoder Smart Sensor Profile (SSP)
- Single-turn/Multi-turn (16 bit / 43 bit)
- Forward-looking technology with 32 Bit processor
- Monitoring the power supply
- Cam switches for Position and Velocity with hysterese

www.wachendorff-automation.com/wdga50v-io-link

Mechanical Data	
Flange	screw flange
Tightening torque nut	max. 8 Nm
Flange material	stainless steel, V2A, incl. nut M20 x 1.5
Housing material	stainless steel, V2A
Flange diameter	Ø 50 mm [Ø 1.969"]

Shaft(s)	
Shaft material	stainless steel, V2A
Starting torque	approx. 1.2 Ncm [1.699 in-ozf] at ambient temperature
Shaft	Ø 6 mm [Ø 0.236"]
Shaft length	L: 13 mm [0.512"]
Max. Permissible shaft loading radial	30 N [3.059 kp]
Max. Permissible shaft loading axial	45 N [4.589 kp]

Bearings	
Bearings type	2 precision ball bearings
Nominale service life	1 x 10'9 revs. at 100 % rated shaft load 1 x 10'10 revs. at 40 % rated shaft load 1 x 10'11 revs. at 20 % rated shaft load
Max. operating speed	6000 rpm

Machinery Directive: basic data safety integrity level	
$MTTF_d$	2200 a
Mission time (TM)	25 a
Nominale service life (L10h)	1 x 10'11 revs. at 20 % rated shaft load and 6000 rpm
Diagnostic coverage (DC)	0 %

Electrical Data	
Power supply/Current consumption	18 VDC up to 30 VDC: typ. 30 mA
Power consumption	max. 0.6 W
Operating principle	magnetic

Sensor data	
Single-turn technology	innovative hall sensor technology
Single-turn resolution	65,536 steps/360° (16 bit)
Single-turn accuracy	± 0.0878° (≤ 12 bit)
Single-turn repeat accuracy	± 0.0878° (≤ 12 bit)
Internal cycle time	250 µs
Multi-turn technology	patented EnDra® technology no battery and no gear.
Multi-turn resolution	up to 32 bit with high precision value up to 43 bit.

Environmental data	
ESD (DIN EN 61000-4-2):	8 kV
Burst (DIN EN 61000-4-4):	2 kV
includes EMC:	DIN EN 61000-6-2 DIN EN 61000-6-3
Vibration: (DIN EN 60068-2-6)	50 m/s^2 (10 Hz up to 2000 Hz)
Shock: (DIN EN 60068-2-27)	1000 m/s^2 (6 ms)
Electrial Safety:	according DIN EN 61010-1 (VDE 0411-1) / IEC 61010-1 / UL 61010-1 / CSA C22.0 No 61010-1-12

Duty information	
Customs tariff number:	90318020
Country of origin:	Germany

Interface	
Interface:	**IO-Link Version: V1.1.4**
Smart Sensor Profile (SSP):	• 2.8 Adjustable Switching Sensor, multi channel • 4.2.1 Measuring and Switching Sensor, high resolution, 1 channel • 4.2.2 Measuring and Switching Sensor, high resolution, 2 channel
Baud rate:	COM 3 230.4 kBit/s
Advice:	The standard settings and customer-specific adjustments in the parameterisation can be set using ISDUs, e.g. scaling, direction of rotation, etc.

General Data	
Weight	approx. 470 g [16.578 oz]
Connections	connector outlet
Protection rating (EN 60529)	IP67 all around
Operating temperature	-40 °C up to +85 °C [-40 °F up to 185 °F]

Storage temperature	-40 °C up to +100 °C [-40 °F up to 212 °F]

More Information
General technical data and safety instructions **http://www.wachendorff-automation.com/gtd**
Options **http://www.wachendorff-automation.com/acc**

Connector, M12x1 IB5 axial, 5-pin

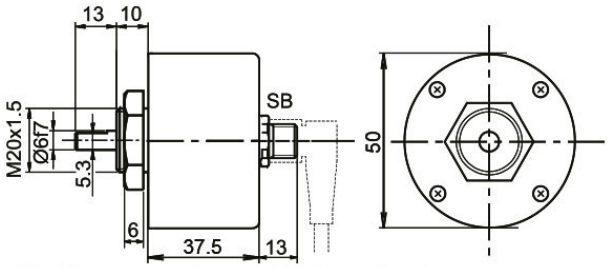

Alle Abmessungen in mm / All dimensions in mm

Description

IB5 axial, 5-pin, shield connected to encoder housing

Assignments	
	IB5
	
L+	1
L-	3
C/Q	4
I	2
n. c.	5

Example Order No.	Type		Your encoder
WDGA 50V	WDGA 50V		WDGA 50V
	Shaft	**Order key**	
06	Ø 6 mm [Ø 0.236"]	06	
	Single-turn Resolution	**Order key**	
16	Single-turn resolution 1 bit up to 16 bit: (e. G. 6 bit)	16	
	Multi-turn Resolution	**Order key**	
43	Multi-turn resolution: (examples) 6 bit = 6 43 bit = 43	16	
	Data protocol	**Order key**	
IL	IO-Link	IL	
	Software	**Order key**	
A	up to date release	A	
	Code	**Order key**	
B	binary	B	
	Power supply	**Order key**	
3	18 V up to 30 V (standard)	3	
	Galvanic isolation	**Order key**	
0	no	0	
	Electrical connections	**Order key**	
IB5	**Connector:**		
	sensor-connector, M12x1, 5-pin, axial, shield connected to encoder housing	IB5	

Example Order No.	WDGA 50V	06	16	43	IL	A	B	3	0	IB5

	WDGA 50V										Example Order No.

For further information please contact our local distributor.
Here you find a list of our distributors worldwide.
https://www.wachendorff-automation.com/contact-en/wachendorff-world-wide/

WACHENDORFF

Wachendorff Automation GmbH & Co. KG
Industriestrasse 7 • 65366 Geisenheim
Germany

Phone: +49 67 22 / 99 65 25
E-Mail: wdg@wachendorff.de
www.wachendorff-automation.de