



Online Data sheet

Encoder WDGI 36E

www.wachendorff-automation.com/wdgi36e

Wachendorff Automation

... systems and encoders

- Complete systems
- Industrial rugged encoders to suit your application
- Standard range and customer versions
- Maximum permissible loads
- 48-hour express production
- Made in Germany
- Worldwide distributor network

Encoder WDGI 36E



Illustration similar



- Compact and robust
- All pulse numbers from 1 to 16,384 ppr available
- Robust construction for industrial use
- Protection to IP67, shaft sealed to IP65

www.wachendorff-automation.com/wdgi36e


Resolution		Power supply/Current consumption	
Pulses per revolution PPR	1 PPR up to 16384 PPR	Operating principle	4.75 VDC up to 30 VDC: typ. 40 mA magnetic
Mechanical Data		Output circuit	HTL (TTL at 5 VDC) HTL, inv. (TTL/RS422 comp. at 5 VDC)
Flange	hollow shaft (blind-bored)	Pulse frequency	HTL up to 16384 ppr: max. 600 kHz TTL up to 16384 ppr: max. 1 MHz
Flange material	aluminum	Channels	ABN and inverted signals
Housing material	stainless steel	Load	max. 40 mA / channel
- 1. Spring plate compensation	axial: ± 0.2 mm [0.0079"], radial: ± 0.1 mm [0.0039"]	Circuit protection	yes
Flange diameter	$\varnothing 36$ mm [$\varnothing 1.417$ "]		
Shaft(s)		Accuracy	
Shaft material	stainless steel	Phase offset	90° $\pm$ max. 7.5 % of the period duration
Starting torque	approx. 0.3 Ncm [0.425 in-ozf] at ambient temperature	pulse-/pause-ratio	50 % $\pm$ max. 7 %
		Environmental data	
Shaft	$\varnothing 6$ mm [$\varnothing 0.236$ "]	ESD (DIN EN 61000-4-2):	8 kV
Insertion depth min.	8 mm [0.315"]	Burst (DIN EN 61000-4-4):	2 kV
Insertion depth max.	17 mm [0.669"]	includes EMC:	DIN EN 61000-6-2 DIN EN 61000-6-3
Max. Permissible shaft loading radial	80 N [8.157 kp]	Vibration: (DIN EN 60068-2-6)	50 m/s ² (10 Hz up to 2000 Hz)
Max. Permissible shaft loading axial	50 N [5.098 kp]	Shock: (DIN EN 60068-2-27)	1000 m/s ² (6 ms)
		Electrical Safety:	according DIN VDE 0160
Shaft	$\varnothing 6.35$ mm [$\varnothing 1/4$ "] Order No: 2Z	Duty information	
Insertion depth min.	8 mm [0.315"]	Customs tariff number:	90318020
Insertion depth max.	17 mm [0.669"]	Country of origin:	Germany
Max. Permissible shaft loading radial	80 N [8.157 kp]	General Data	
Max. Permissible shaft loading axial	50 N [5.098 kp]	Weight	approx. 130 g [4.586 oz]
Bearings		Connections	cable or connector outlet
Bearings type	2 precision ball bearings	Protection rating (EN 60529)	Housing: IP65, IP67; shaft sealed: IP65; cable outlet K1: IP40
Nominal service life	1.4 x 10 ⁸ revs. at 100 % rated shaft load 2 x 10 ⁹ revs. at 40 % rated shaft load 1.7 x 10 ¹⁰ revs. at 20 % rated shaft load	Operating temperature	Connector: -40 °C up to +85 °C, Cable: -20 °C up to +80 °C (Option ACA: -40 °C up to +85 °C). Connector: -40 °F up to +185 °F, Cable: -4 °F up to +176 °F, Option ACA: -40 °F up to +185 °F
Max. operating speed	12000 rpm	Storage temperature	Connector: -40 °C up to +85 °C, Cable: -30 °C up to +80 °C (Option ACA: -40 °C up to +85 °C) Connector: -40 °F up to +185 °F, cable: -22 °F up to +176 °F, (Option ACA: -40 °F up to +185 °F)
Machinery Directive: basic data safety integrity level			
MTTF _d	2200 a		
Mission time (TM)	25 a		
Nominal service life (L10h)	1.7 x 10 ¹⁰ revs. at 20 % rated shaft load and 12000 rpm		
Diagnostic coverage (DC)	0 %		
Electrical Data			

More Information

General technical data and safety instructions
<http://www.wachendorff-automation.com/gtd>

Options
<http://www.wachendorff-automation.com/acc>


Cable connection L2 axial with 2 m cable

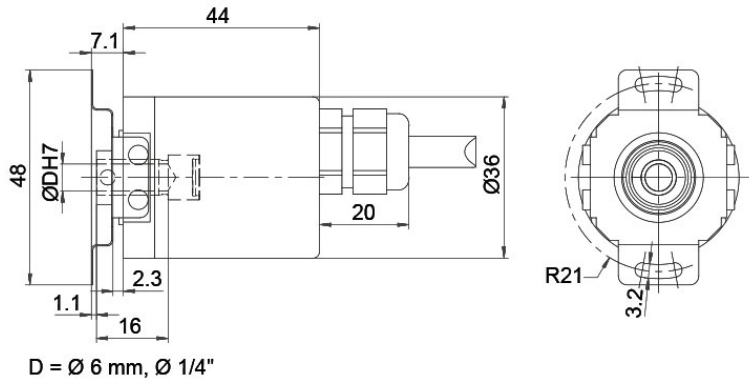

Description	ABN inv. poss.
L2 axial, shield connected to encoder housing	•

Assignments		
	L2	L2
Circuit	N35	M35
GND	WH	WH
(+) Vcc	BN	BN
A	GN	GN
B	YE	YE
N	GY	GY
-	-	-
A inv.	-	RD
B inv.	-	BK, (BU at ACA)
N inv.	-	VT
Shield	flex	flex

Cable connection L3 radial with 2 m cable

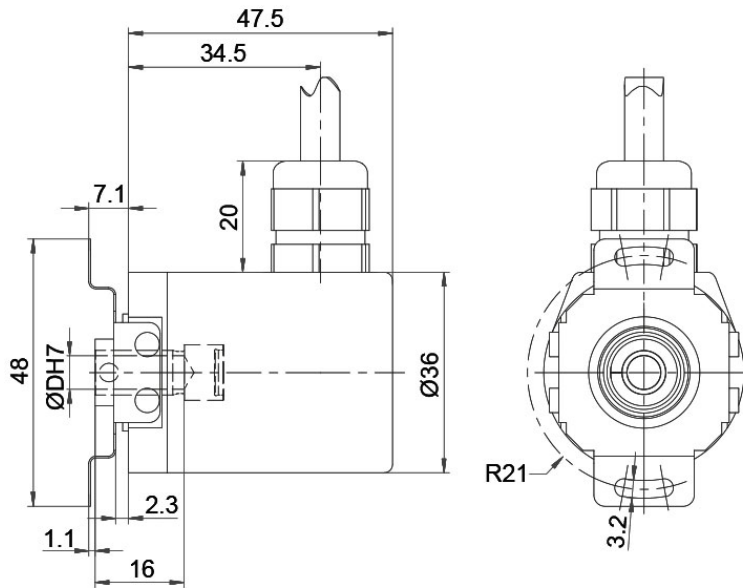

D = Ø 6 mm, Ø 1/4"

Description


ABN inv. poss.

L3 radial, shield connected to encoder housing

•

Assignments		
	L3	L3
Circuit	N35	M35
GND	WH	WH
(+) Vcc	BN	BN
A	GN	GN
B	YE	YE
N	GY	GY
-	-	-
A inv.	-	RD
B inv.	-	BK, (BU at ACA)
N inv.	-	VT
Shield	flex	flex

Cable K1 (IP40) radial with 2 m cable

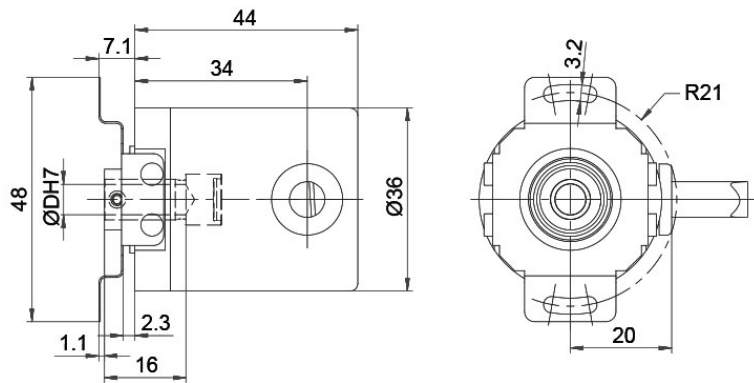

D = Ø 6 mm, Ø 1/4"

Description


ABN inv. poss.

K1 radial, shield not connected (IP40)

•

Assignments		
	K1	K1
Circuit	N35	M35
GND	WH	WH
(+) Vcc	BN	BN
A	GN	GN
B	YE	YE
N	GY	GY
-	-	-
A inv.	-	RD
B inv.	-	BK
N inv.	-	VT
Shield	flex	flex

Sensor connector (M12x1) SB axial, 5-, 8-pin

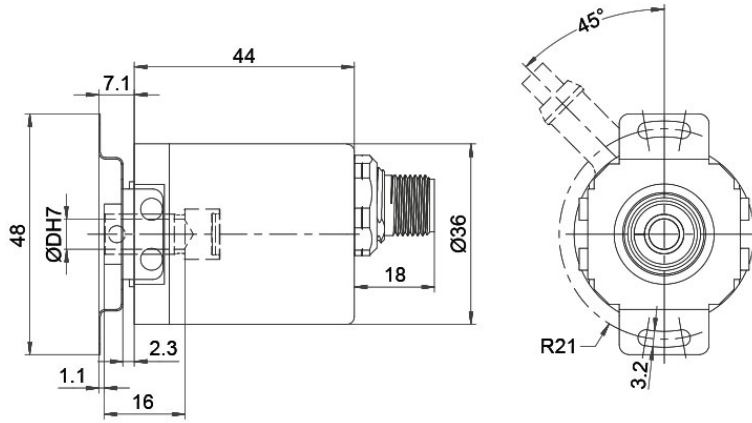


D = Ø 6 mm, Ø 1/4"

Description	ABN inv. poss.
SB5 axial, 5-pin, Connector connected to encoder housing	-
SB8 axial, 8-pin, Connector connected to encoder housing	•

Assignments		
	SB5	SB8
	5-pin	8-pin
Circuit	N35	M35
GND	3	1
(+) Vcc	1	2
A	4	3
B	2	4
N	5	5
-	-	-
A inv.	-	6
B inv.	-	7
N inv.	-	8
n. c.	-	-
Shield	-	-

Sensor-connector (M12x1) SC radial, 5-, 8-pin

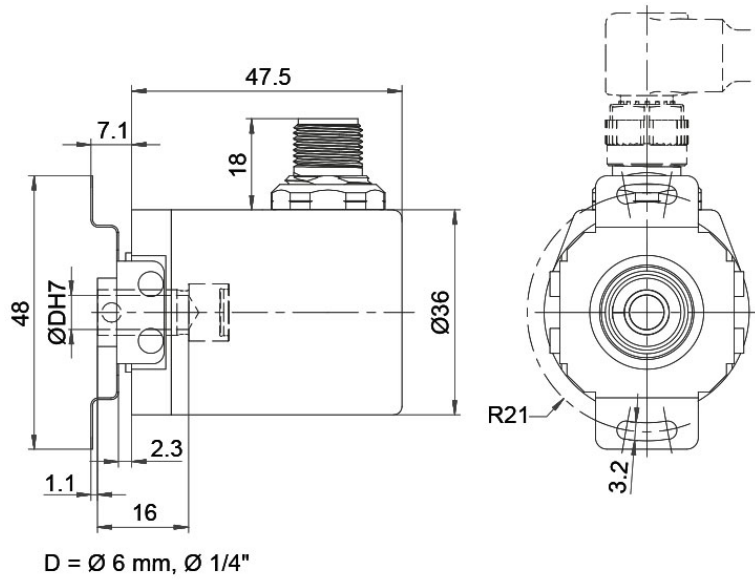

Description	ABN inv. poss.
SC5 radial, 5-pin, Connector connected to encoder housing	-
SC8 radial, 8-pin, Connector connected to encoder housing	•

Assignments		
	SC5 5-pin	SC8 8-pin
Circuit	N35	M35
GND	3	1
(+) Vcc	1	2
A	4	3
B	2	4
N	5	5
-	-	-
A inv.	-	6
B inv.	-	7
N inv.	-	8
n. c.	-	-
Shield	-	-

Options

Low-friction bearings

The encoder WDGI 36E is also available as a particularly smooth-running low-friction encoder. The starting torque is thereby changed to $\leq 0.25 \text{ Ncm}$ [0.354 in-ozf] and the protection class at the shaft input to IP50.

Order key

AAC

Low temperature

The encoder WDGI 36E with the output circuit types M35, N35 is also available with the extended temperature range -40°C up to $+85^\circ\text{C}$ [-40°F up to $+185^\circ\text{F}$] (measured at the flange).

Order key

ACA

Pressure equalising membrane

The WDGI 36E shaft encoder is also optionally available with a pressure equalising membrane. This prevents water from penetrating into the encoder housing in the case of high air humidity.

The IP67 protection level, temperature range and salt spray resistance are maintained. Resistant to chemicals and solvents in accordance with DIN EN ISO 2812-1.

Order key

ACR

Cable length

The encoder WDGI 36E can be supplied with more than 2 m cable. The maximum cable length depends on the supply voltage and the frequency; see <https://www.wachendorff-automation.com/download-gtd-incremental-encoders/>

Please extend the standard order code with a three figure number, specifying the cable length in decimetres.


Example: 5 m cable = 050

Order key

XXX = Decimeter

Example Order No.	Type					Your encoder
WDGI 36E	WDGI 36E					WDGI 36E
	Bore size					
06	06; 2Z					
	Pulses per revolution PPR:					
1-16384	1-16384					1-16384
	Channels:					
ABN	ABN					ABN
	Output circuit					
N35	Resolution PPR	Power supply VDC	Output circuit	-	Order key	
	1-16384	4.75 - 30	HTL (TTL at 5 VDC)	-	N35	
		4.75 - 30	HTL, inv. (TTL/RS422 comp. at 5 VDC)	-	M35	
	Electrical connections					
K1	Description			ABN inv. poss.	Order key	
	Cable: length (2 m standard, WDG 58T: 1 m)					
	radial, shield not connected (IP40)			•	K1	
	axial, shield connected to encoder housing			•	L2	
	radial, shield connected to encoder housing			•	L3	
	Connector: (shield connected to encoder housing)					
	sensor-connector, M12x1, 5-pin, axial			-	SB5	
	sensor-connector, M12x1, 5-pin, radial			-	SC5	
	sensor-connector, M12x1, 8-pin, axial			•	SB8	
	sensor-connector, M12x1, 8-pin, radial			•	SC8	
	Options					
	Description			Order key		
	Low-friction bearings			AAC		
	Low temperature			ACA		
	Pressure equalising membrane			ACR		
	Cable length			Cable lenght		
	Without option			Empty		

Example Order No. =	WDGI 36E	06	1-16384	ABN	N35	K1		WDGI 36E		1-16384	ABN				Your encoder
----------------------------	----------	----	---------	-----	-----	----	--	----------	--	---------	-----	--	--	--	---------------------



For further information please contact our local distributor.
Here you find a list of our distributors worldwide.
<https://www.wachendorff-automation.com/contact-en/wachendorff-world-wide/>

WACHENDORFF

Wachendorff Automation GmbH & Co. KG
Industriestrasse 7 • 65366 Geisenheim
Germany

Phone: +49 67 22 / 99 65 25
E-Mail: wdg@wachendorff.de
www.wachendorff-automation.de

