



Online Data sheet

Encoder WDG 30A

www.wachendorff-automation.com/wdg30a

Wachendorff Automation

... systems and encoders

- Complete systems
- Industrial rugged encoders to suit your application
- Standard range and customer versions
- Maximum permissible loads
- 48-hour express production
- Made in Germany
- Worldwide distributor network

Encoder WDG 30A



- very compact construction for use in harsh conditions
- permissible bearing loads similar to our "big encoders"
- up to IP67 all around
- Hall effect based signal generation

www.wachendorff-automation.com/wdg30a

Illustration similar

Resolution

Pulses per revolution PPR up to 1024 PPR

Mechanical Data

Housing

Flange	synchro flange
Flange material	aluminum
Housing cap	aluminum
Housing	Ø 30 mm [Ø 1.181"]

Shaft(s)

Shaft material	stainless steel
Starting torque	approx. 0.2 Ncm [0.283 in-ozf] at ambient temperature

Shaft	Ø 6 mm [Ø 0.236"]
Shaft length	L: 12 mm [0.472"]
Max. Permissible shaft loading radial	80 N [8.157 kp]
Max. Permissible shaft loading axial	50 N [5.098 kp]

Bearings

Bearings type	2 precision ball bearings
Nominal service life	0.55 x 10 ⁹ revs. at 100 % rated shaft load 8.5 x 10 ¹⁰ revs. at 40 % rated shaft load 6.8 x 10 ¹¹ revs. at 20 % rated shaft load
Max. operating speed	12000 rpm

Machinery Directive: basic data safety integrity level

MTTF _d	200 a
Mission time (TM)	25 a
Nominal service life (L10h)	6.8 x 10 ¹¹ revs. at 20 % rated shaft load and 12000 rpm
Diagnostic coverage (DC)	0 %

Electrical Data

Power supply/Current consumption	4,75 VDC up to 5,5 VDC: typ. 40 mA
Power supply/Current consumption	5 VDC up to 30 VDC: typ. 40 mA
Operating principle	magnetic
Output circuit	TTL, RS422 compatible, inv. TTL HTL (TTL at 5 VDC) HTL, inv. (TTL/RS422 comp. at 5 VDC)

Pulse frequency	≤ 64 ppr: max. 20 kHz ≤ 1024 ppr: max. 200 kHz
Channels	AB ABN and inverted signals
Load	max. 30 mA / channel
Circuit protection	no

Accuracy

Phase offset	90° ± max. 25% of the period duration
pulse-/pause-ratio	at 1 ppr up to 128 ppr: 50 % ± max. 7 % 129 ppr - 256 ppr: 50 % ± max. 9 % 257 ppr - 512 ppr: 50 % ± max. 13 % 513 ppr - 1024 ppr: 50 % ± max. 18 %

Environmental data

ESD (DIN EN 61000-4-2):	8 kV
Burst (DIN EN 61000-4-4):	2 kV
includes EMC:	DIN EN 61000-6-2 DIN EN 61000-6-3
Vibration: (DIN EN 60068-2-6)	50 m/s ² (10 Hz up to 2000 Hz)
Shock: (DIN EN 60068-2-27)	1000 m/s ² (6 ms)
Electrical Safety:	according DIN VDE 0160

Duty information

Customs tariff number:	90318020
Country of origin:	Germany


General Data

Weight	approx. 50 g [1.764 oz]
Connections	cable or connector outlet
Protection rating (EN 60529)	IP65 all around with SK6, housing IP40 with K7, L7
Operating temperature	-20 °C up to +80 °C [-4 °F up to +176 °F]
Storage temperature	-20 °C up to +80 °C [-4 °F up to +176 °F]

More Information

General technical data and safety instructions
<http://www.wachendorff-automation.com/gtd>
Options
<http://www.wachendorff-automation.com/acc>

Cable connection K7, L7 (IP40) with 2 m cable

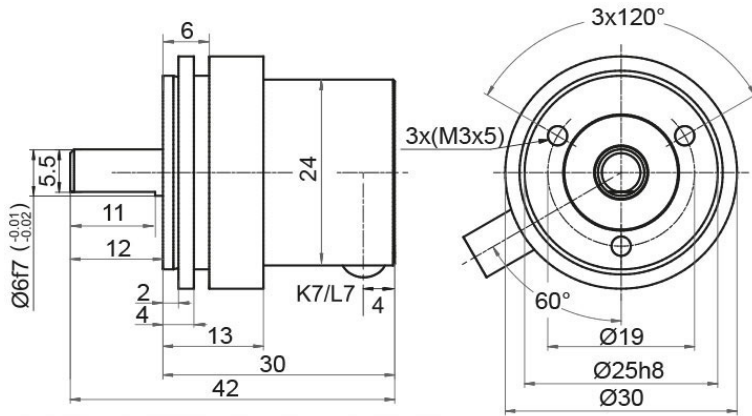


Alle Abmessungen in mm / All dimensions in mm

Description	ABN inv. poss.
K7 radial, shield not connected (IP40)	•
L7 radial, shield connected to encoder housing (IP40)	•

Assignments		
	K7, L7	K7, L7
Circuit	N05, N30	M05, M30
GND	WH	WH
(+) Vcc	BN	BN
A	GN	GN
B	YE	YE
N	GY	GY
-	-	-
A inv.	-	RD
B inv.	-	PK, (BK at ACA)
N inv.	-	BU, (VT at ACA)
Shield	flex	flex

Connector (M8x1) SK6, 6-pin

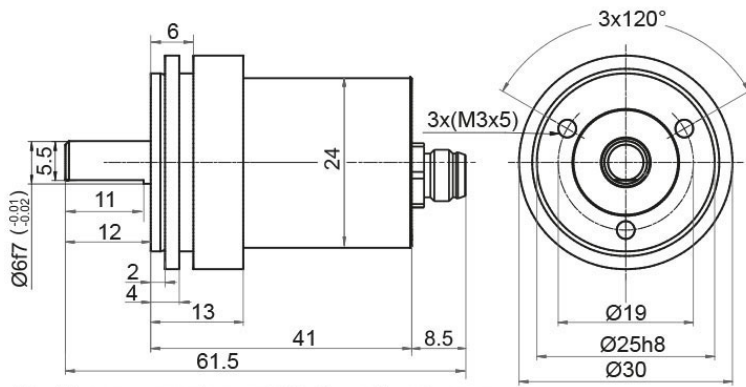

Alle Abmessungen in mm / All dimensions in mm

Description


ABN inv. poss.

SK6 axial, 6-pin, Connector connected to encoder housing

-

Assignments	
	SK6
	6-pin
Circuit	N05, N30
GND	3
(+) Vcc	2
A	4
B	5
N	1
-	-
A inv.	-
B inv.	-
N inv.	-
n. c.	6
Shield	-

Connector (M8x1) SK8, 8-pin

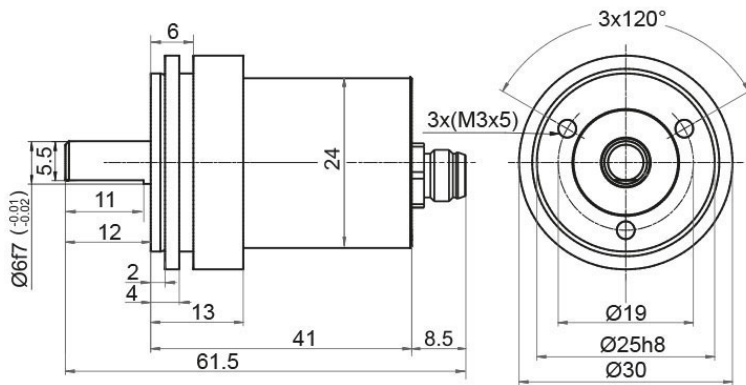

Alle Abmessungen in mm / All dimensions in mm

Description

ABN inv. poss.

SK8 axial, 8-pin, Connector connected to encoder housing

•

Assignments	
	SK8
	8-pin
Circuit	M05, M30
GND	1
(+) Vcc	2
A	3
B	4
N	5
-	-
A inv.	6
B inv.	7
N inv.	8
n. c.	-
Shield	-

Options

Low-friction bearings

The encoder WDG 30A is also available as a particularly smooth-running low-friction encoder. The starting torque is thereby changed to $\leq 0.1 \text{ Ncm}$ [0.141 in-ozf] and the protection class at the shaft input to IP50.

Order key

AAC

IP67 all around (with connector SK6/SK8 only)

The encoder WDG 30A with SK6/SK8 can be supplied in a full IP67 version.
Max. RPM: 3500 rpm
Permitted Shaft-Loading, axial: 30 N [3.059 kp]
Permitted Shaft-Loading, radial: 45 N [4.589 kp]
Max. PPR: 1024 ppr
Starting-torque: approx. 1.2 Ncm [1.699 in-ozf] at ambient temperature

Order key

AAO

Low temperature

The encoder WDG 30A with the output circuit types M05, N05, M30, N30 is also available with the extended temperature range $-40 \text{ }^{\circ}\text{C}$ up to $+80 \text{ }^{\circ}\text{C}$ [$-40 \text{ }^{\circ}\text{F}$ up to $+176 \text{ }^{\circ}\text{F}$] (measured at the flange).

Order key

ACA

Cable length


The encoder WDG 30A can be supplied with more than 2 m cable. The maximum cable length depends on the supply voltage and the frequency; see www.wachendorff-automation.com/atd
Please extend the standard order code with a three figure number, specifying the cable length in decimetres.
Example: 5 m cable = 050

Order key

XXX = Decimeter

Example Order No.	Type					Your encoder
WDG 30A	WDG 30A					WDG 30A
	Pulses per revolution PPR:					
64	64, 16, 32, 1-1024					
	Channels:					
AB	AB, ABN					
	Output circuit					
M05	Resolution PPR	Power supply VDC	Output circuit	-	Order key	
	16, 32, 64	4.75 - 5.5	TTL, RS422 comp., inverted	-	M05	
		4.75 - 5.5	TTL	-	N05	
	1-1024	5 - 30	HTL, inv. (TTL/RS422 comp. at 5 VDC)	-	M30	
		5 - 30	HTL (TTL at 5 VDC)	-	N30	
	Electrical connections					
K7	Description			ABN inv. poss.	Order key	
	Cable: length (2 m standard, WDG 58T: 1 m)					
	radial, shield not connected (IP40)			•	K7	
	radial, shield connected to encoder housing (IP40)			•	L7	
	Connector: (shield connected to encoder housing)					
	connector, M8x1, 6-pin, axial			-	SK6	
	connector, M8x1, 8-pin, axial			•	SK8	
	Options					
	Description			Order key		
	Low-friction bearings			AAC		
	IP67 all around (with connector SK6/SK8 only)			AAO		
	Low temperature			ACA		
	Cable length			Cable lenght		
	Without option			Empty		

Example Order No.=	WDG 30A	64	AB	M05	K7		WDG 30A					Your encoder
---------------------------	---------	----	----	-----	----	--	---------	--	--	--	--	---------------------



For further information please contact our local distributor.
Here you find a list of our distributors worldwide.
<https://www.wachendorff-automation.com/contact-sales-en/>

WACHENDORFF

Wachendorff Automation GmbH & Co. KG
Industriestrasse 7 • 65366 Geisenheim
Germany

Phone: +49 67 22 / 99 65 25
E-Mail: wdg@wachendorff.de
www.wachendorff-automation.de

