



# Online Data Sheet

## Encoder WDG 30A

[www.wachendorff-automation.com/wdg30a](http://www.wachendorff-automation.com/wdg30a)

### Wachendorff Automation

#### ... systems and encoders

- Complete systems
- Industrial rugged encoders to suit your application
- Standard range and customer versions
- Maximum permissible loads
- 48-hour express production
- Made in Germany
- Worldwide distributor network

# Encoder WDG 30A



- very compact construction for use in harsh conditions
- permissible bearing loads similar to our "big encoders"
- up to IP67 all around
- Hall effect based signal generation

[www.wachendorff-automation.com/wdg30a](http://www.wachendorff-automation.com/wdg30a)

## Resolution

Max. pulses per revolution PPR	1 PPR up to 128 PPR, 256 PPR, 512 PPR, 1024 PPR
--------------------------------	---

## Mechanical Data

### Housing

Flange	synchro flange
Flange material	aluminum
Housing cap	aluminum
Housing	Ø 30 mm

### Shaft(s)

Shaft material	stainless steel
Starting torque	approx. 0.2 Ncm at ambient temperature

Shaft	Ø 6 mm
Shaft length	L: 12 mm
Max. Permissible shaft loading radial	80 N
Max. Permissible shaft loading axial	50 N

### Bearings

Bearings type	2 precision ball bearings
Nominal service life	0.55 x 10 <sup>9</sup> revs. at 100 % rated shaft load 8.5 x 10 <sup>10</sup> revs. at 40 % rated shaft load 6.8 x 10 <sup>11</sup> revs. at 20 % rated shaft load
Max. operating speed	12000 rpm

## Machinery Directive: basic data safety integrity level

MTTF <sub>d</sub>	200 a
Mission time (TM)	25 a
Nominal service life (L10h)	6.8 x 10 <sup>11</sup> revs. at 20 % rated shaft load and 12000 rpm
Diagnostic coverage (DC)	0 %

## Electrical Data

Power supply/Current consumption	4,75 VDC up to 5,5 VDC: typ. 40 mA
Power supply/Current consumption	5 VDC up to 30 VDC: typ. 40 mA
Output circuit	TTL, RS422 compatible, inv. TTL HTL HTL, inv.

Pulse frequency	64 ppr: max. 20 kHz 1024 ppr: max. 200 kHz
Channels	AB ABN and inverted signals
Load	max. 30 mA / channel
Circuit protection	no

## Accuracy

Phase offset	90° ± max. 25% of the period duration
pulse-/pause-ratio	at 1 ppr up to 128 ppr: 50 % ± max. 7 % at 256 ppr: 50 % ± max. 9 % at 512 ppr: 50 % ± max. 13 % at 1024 ppr: 50 % ± max. 18 %

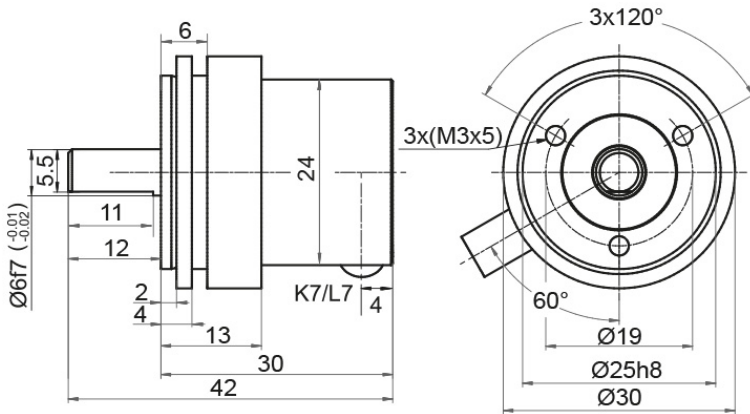
## General Data

Weight	approx. 50 g
Connections	cable or connector outlet
Protection rating (EN 60529)	IP65 all around with SK6, housing IP40 with K7, L7
Operating temperature	-20 °C up to +80 °C
Storage temperature	-20 °C up to +80 °C

## More Information

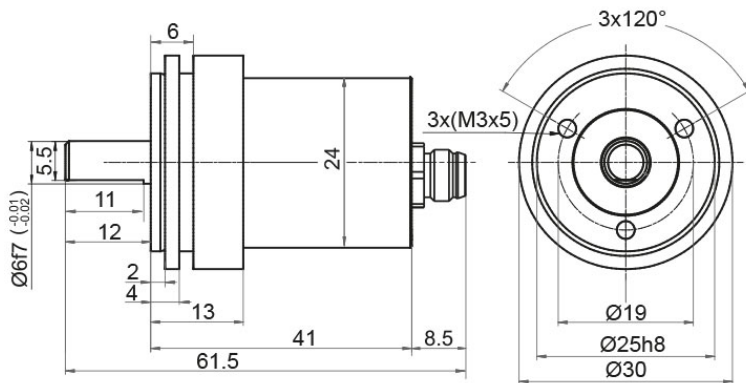
General technical data and safety instructions  
<http://www.wachendorff-automation.com/gtd>

Options  
<http://www.wachendorff-automation.com/acc>


**Cable connection K7, L7 (IP40) with 2 m cable**


Description	ABN inv. poss.
<b>K7</b> radial, shield not connected (IP40)	•
<b>L7</b> radial, shield connected to encoder housing (IP40)	•

Assignments		
	K7, L7	K7, L7
<b>Circuit</b>	N05, N30	M05, M30
<b>GND</b>	WH	WH
<b>(+) Vcc</b>	BN	BN
<b>A</b>	GN	GN
<b>B</b>	YE	YE
<b>N</b>	GY	GY
<b>Light reserve warning</b>	-	-
<b>A inv.</b>	-	RD
<b>B inv.</b>	-	PK, (BK at ACA)
<b>N inv.</b>	-	BU, (VT at ACA)
<b>Shield</b>	flex	flex

**Connector SK6, 6-pin**

**Description**
**ABN inv. poss.**
**SK6** axial, 6-pin, Connector connected to encoder housing

-

Assignments	
	<b>SK6</b>
	<b>6-pin</b>
	
<b>Circuit</b>	N05, N30
<b>GND</b>	3
<b>(+) Vcc</b>	2
<b>A</b>	4
<b>B</b>	5
<b>N</b>	1
<b>Light reserve warning</b>	-
<b>A inv.</b>	-
<b>B inv.</b>	-
<b>N inv.</b>	-
<b>n. c.</b>	6
<b>Shield</b>	-

## Options

### Low-friction bearings

The encoder WDG 30A is also available as a particularly smooth-running low-friction encoder. The starting torque is thereby changed to 0.1 Ncm and the protection class at the shaft input to IP50.

### Order key

**AAC**

### IP67 all around (with connector SK6 only)

The encoder WDG 30A with SK6 can be supplied in a full IP67 version.  
 Max. RPM: 3500 rpm  
 Permitted Shaft-Loading, axial: 30 N  
 Permitted Shaft-Loading, radial: 45 N  
 Max. PPR: 1024 ppr  
 Starting-torque: approx. 1.2 Ncm at ambient temperature

### Order key

**AAO**

### Low temperature

The encoder WDG 30A with the output circuit types M05, N05, M30, N30 is also available with the extended temperature range -40 °C up to +80 °C (measured at the flange).

### Order key

**ACA**

### Cable length

The encoder WDG 30A can be supplied with more than 2 m cable. The maximum cable length depends on the supply voltage and the frequency; see [www.wachendorff-automation.com/atd](http://www.wachendorff-automation.com/atd)

Please extend the standard order code with a three figure number, specifying the cable length in decimetres.

Example: 5 m cable = 050

### Order key

**XXX = Decimeter**

Example Order No.	Type				Your encoder
WDG 30A	WDG 30A				WDG 30A
<b>Pulses per revolution PPR:</b>					
64	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 54, 55, 56, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 67, 68, 69, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100, 101, 102, 103, 104, 105, 106, 107, 108, 109, 110, 111, 112, 113, 114, 115, 116, 117, 118, 119, 120, 121, 122, 123, 124, 125, 126, 127, 128, 256, 512, 1024 Other PPRs on request				
<b>Channels:</b>					
ABN	AB, ABN				
<b>Output circuit</b>					
M30	<b>Resolution PPR</b>	<b>Power supply VDC</b>	<b>Output circuit</b>	<b>Light reserve warning</b>	<b>Order key</b>
	16, 32, 64	4.75 - 5.5	TTL, RS422 comp., inverted	-	M05
		4.75 - 5.5	TTL	-	N05
	1-128, 256, 512, 1024	5 - 30	HTL inverted	-	M30
		5 - 30	HTL	-	N30
<b>Electrical connections</b>					
K7	<b>Description</b>			<b>ABN inv. poss.</b>	<b>Order key</b>
	<b>Cable: length (2 m standard, WDG 58T: 1 m)</b>				
	radial, shield not connected (IP40)			•	K7
	radial, shield connected to encoder housing (IP40)			•	L7
	<b>Connector: (shield connected to encoder housing)</b>				
connector, M8x1, 6-pin, axial			-	SK6	
<b>Options</b>					
	<b>Description</b>			<b>Order key</b>	
	Low-friction bearings			AAC	
	IP67 all around (with connector SK6 only)			AAO	
	Low temperature			ACA	
	Without option			Empty	
	Cable length			XXX = Decimeter	

<b>Example Order No.=</b>	WDG 30A	64	ABN	M30	K7		WDG 30A					<b>Your encoder</b>
---------------------------	---------	----	-----	-----	----	--	---------	--	--	--	--	---------------------



For further information please contact our local distributor.  
Here you find a list of our distributors worldwide.  
<https://www.wachendorff-automation.com/>



Wachendorff Automation GmbH & Co. KG  
Industriestrasse 7 • 65366 Geisenheim  
Germany

Phone: +49 67 22 / 99 65 25  
Fax: +49 67 22 / 99 65 70  
E-Mail: [wdg@wachendorff.de](mailto:wdg@wachendorff.de)  
[www.wachendorff-automation.de](http://www.wachendorff-automation.de)

