



# Online Data sheet

## Encoder WDG 100H

[www.wachendorff-automation.com/wdg100h](http://www.wachendorff-automation.com/wdg100h)

### **Wachendorff Automation**

#### **... systems and encoders**

- Complete systems
- Industrial rugged encoders to suit your application
- Standard range and customer versions
- Maximum permissible loads
- 48-hour express production
- Made in Germany
- Worldwide distributor network

# Encoder WDG 100H



Illustration similar



- Rugged and extremely thin thru-bore encoder for extension on power motors
- Thru-Bore, bore size max. 45 mm [1.772"]
- Full connection protection with 10 VDC up to 30 VDC
- Easy mounting
- Meets protection class IP54
- Up to 20,480 PPR
- Optional: -40 °C up to +80 °C [-40 °F up to +176 °F]  
Protection to IP55 all around

[www.wachendorff-automation.com/wdg100h](http://www.wachendorff-automation.com/wdg100h)

Resolution	
Pulses per revolution PPR	up to 20480 PPR

Mechanical Data	
Flange	hollow shaft (through-bored)
Flange material	aluminum
Housing material	aluminum, powder coated
Torque supports	incl. 1 torque support WDGDS10001
- 1. Spring plate compensation	axial: ±0.8 mm [0.0315"], radial: ±0.2 mm [0.0079"]
Flange diameter	Ø 100 mm [Ø 3.543"]

Shaft(s)	
Shaft material	stainless steel
Starting torque	approx. 1.5 Ncm [2.124 in-ozf] at ambient temperature
Fixing	2 x M4, DIN 913; Starting torque: 2,5 Nm

Shaft	Ø 25 mm [Ø 0.984"]
Shaft length	L: 42 mm [1.654"]
Insertion depth min.	52 mm [2.047"]
Max. Permissible shaft loading radial	200 N [20.394 kp]
Max. Permissible shaft loading axial	100 N [10.197 kp]

Shaft	Ø 28 mm [Ø 1.102"]
Shaft length	L: 42 mm [1.654"]
Insertion depth min.	52 mm [2.047"]
Max. Permissible shaft loading radial	200 N [20.394 kp]
Max. Permissible shaft loading axial	100 N [10.197 kp]

Shaft	Ø 30 mm [Ø 1.181"]
Shaft length	L: 42 mm [1.654"]
Insertion depth min.	52 mm [2.047"]
Max. Permissible shaft loading radial	200 N [20.394 kp]
Max. Permissible shaft loading axial	100 N [10.197 kp]

Shaft	Ø 32 mm [Ø 1.26"]
Shaft length	L: 42 mm [1.654"]
Insertion depth min.	52 mm [2.047"]
Max. Permissible shaft loading radial	200 N [20.394 kp]
Max. Permissible shaft loading axial	100 N [10.197 kp]

Shaft	Ø 38 mm [Ø 1.496"]
Shaft length	L: 42 mm [1.654"]
Insertion depth min.	52 mm [2.047"]
Max. Permissible shaft loading radial	200 N [20.394 kp]
Max. Permissible shaft loading axial	100 N [10.197 kp]

Shaft	Ø 40 mm [Ø 1.575"]
Shaft length	L: 42 mm [1.654"]
Insertion depth min.	52 mm [2.047"]
Max. Permissible shaft loading radial	200 N [20.394 kp]
Max. Permissible shaft loading axial	100 N [10.197 kp]

Shaft	Ø 42 mm [Ø 1.654"]
Shaft length	L: 42 mm [1.654"]
Insertion depth min.	52 mm [2.047"]
Max. Permissible shaft loading radial	200 N [20.394 kp]
Max. Permissible shaft loading axial	100 N [10.197 kp]

Shaft	Ø 45 mm [Ø 1.772"]
Shaft length	L: 42 mm [1.654"]
Insertion depth min.	52 mm [2.047"]
Max. Permissible shaft loading radial	200 N [20.394 kp]
Max. Permissible shaft loading axial	100 N [10.197 kp]

Bearings	
Bearings type	2 precision ball bearings
Nominale service life	3 x 10 <sup>10</sup> revs. at 100 % rated shaft load 1 x 10 <sup>11</sup> revs. at 40 % rated shaft load 1 x 10 <sup>12</sup> revs. at 20 % rated shaft load
Max. operating speed	3500 rpm

Machinery Directive: basic data safety integrity level	
MTTF <sub>d</sub>	200 a
Mission time (TM)	25 a
Nominale service life (L10h)	1 x 10 <sup>12</sup> revs. at 20 % rated shaft load and 3500 rpm
Diagnostic coverage (DC)	0 %

<b>Electrical Data</b>	
Power supply/Current consumption	4,75 VDC up to 5,5 VDC: typ. 70 mA (100 mA only F05, P05)
Power supply/Current consumption	5 VDC up to 30 VDC: typ. 70 mA
Power supply/Current consumption	10 VDC up to 30 VDC: typ. 70 mA (100 mA only F24, P24, 645)
Operating principle	optical
Output circuit	TTL TTL, RS422 compatible, inv. HTL HTL, inv. 1 Vpp sin/cos
Pulse frequency	TTL 5000 ppr: max. 200 kHz HTL 5000 ppr: max. 200 kHz TTL more than 1200 ppr: max. 2 MHz HTL more than 1200 ppr: max. 600 kHz 1 Vpp sin/cos: max. 100 kHz
Channels	AB ABN and inverted signals
Load	max. 40 mA / channel @ 1 Vpp sin/cos: min. 120 Ohm
Circuit protection	circuit type H24 and R24 only

<b>Accuracy</b>	
Phase offset	90° ± max. 7.5 % of the period duration
pulse-/pause-ratio	5000 ppr: 50 % ± max. 7 % Output circuits F24, P24, F05, P05, 645: 50 % ± max. 10 %


<b>Environmental data</b>	
ESD (DIN EN 61000-4-2):	8 kV
Burst (DIN EN 61000-4-4):	2 kV
includes EMC:	DIN EN 61000-6-2 DIN EN 61000-6-3
Vibration: (DIN EN 60068-2-6)	50 m/s <sup>2</sup> (10 Hz up to 2000 Hz)
Shock: (DIN EN 60068-2-27)	1000 m/s <sup>2</sup> (6 ms)
Electrial Safety:	according DIN VDE 0160

<b>Duty information</b>	
Customs tariff number:	90318020
Country of origin:	Germany

<b>General Data</b>	
Weight	approx. 720 g [25.397 oz]
Connections	cable or connector, radial
Protection rating (EN 60529)	IP54
Operating temperature	-20 °C up to +80 °C [-4 °F up to +176 °F] 1 Vpp: -10 °C up to +70 °C [+14 °F up to +158 °F]
Storage temperature	-30 °C up to +80 °C [-22 °F up to 176 °F]

<b>More Information</b>	
General technical data and safety instructions <a href="http://www.wachendorff-automation.com/gtd">http://www.wachendorff-automation.com/gtd</a>	
Options <a href="http://www.wachendorff-automation.com/acc">http://www.wachendorff-automation.com/acc</a>	

**Cable connection K3, L3 with 2 m cable**

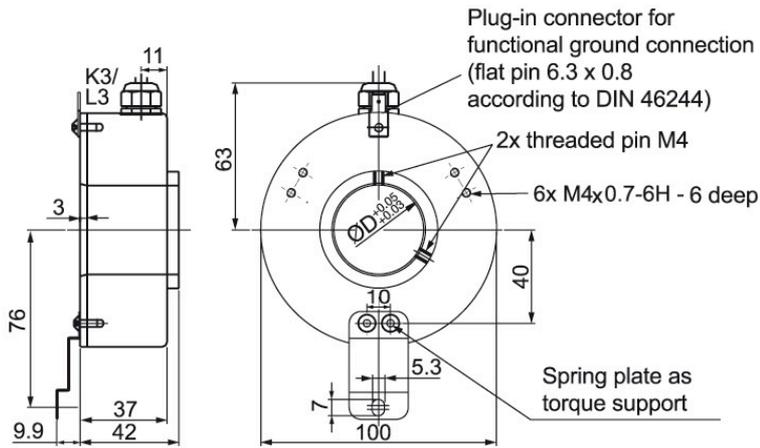


**Description**

**ABN inv. poss.**

<b>K3</b>	radial, shield not connected	•
<b>L3</b>	radial, shield connected to encoder housing	•

<b>Assignments</b>			
	<b>K3, L3</b>	<b>K3, L3</b>	<b>L3</b>
<b>Circuit</b>	F05, H05, F24, H24, H30	P05, R05, P24, R24, 245, 645, R30	SIN
<b>GND</b>	WH	WH	WH
<b>(+) Vcc</b>	BN	BN	BN
<b>A</b>	GN	GN	GN
<b>B</b>	YE	YE	GY
<b>N</b>	GY	GY	BK
<b>-</b>	-	-	-
<b>A inv.</b>	-	RD	YE
<b>B inv.</b>	-	BK, (BU at ACA)	PK
<b>N inv.</b>	-	VT	VT
<b>Shield</b>	flex	flex	flex

**Connector (M16x0.75) SH, 5-, 6-, 8-, 12-pin**

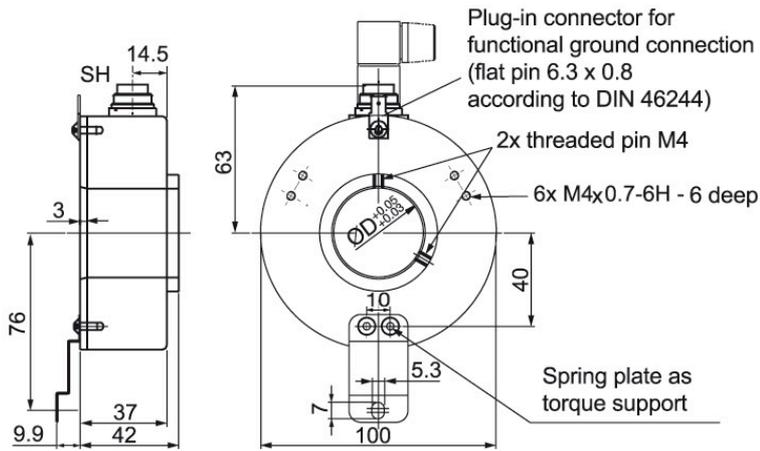

**Description**


**ABN inv. poss.**

<b>SH5</b>	radial, 5-pin, Connector connected to encoder housing	-
<b>SH6</b>	radial, 6-pin, Connector connected to encoder housing	-
<b>SH8</b>	radial, 8-pin, Connector connected to encoder housing	•
<b>SH12</b>	radial, 12-pin, Connector connected to encoder housing	•

**Assignments**

	<b>SH5</b>	<b>SH6</b>	<b>SH8</b>	<b>SH8</b>	<b>SH12</b>	<b>SH12</b>
	<b>5-pin</b>	<b>6-pin</b>	<b>8-pin</b>	<b>8-pin</b>	<b>12-pin</b>	<b>12-pin</b>
<b>Circuit</b>	F05, H05, F24, H24, H30	F05, H05, F24, H24, H30	P05, R05, P24, R24, R30, 245, 645	SIN	P05, R05, P24, R24, 245, 645, R30	SIN
<b>GND</b>	1	6	1	1	K, L	K, L
<b>(+) Vcc</b>	2	1	2	2	M, B	M, B
<b>A</b>	3	2	3	3	E	E
<b>B</b>	4	4	4	4	H	H
<b>N</b>	5	3	5	5	C	C
<b>-</b>	-	-	-	-	-	-
<b>A inv.</b>	-	-	6	6	F	F
<b>B inv.</b>	-	-	7	7	A	A
<b>N inv.</b>	-	-	8	8	D	D
<b>n. c.</b>	-	5	-	-	G, J	G, J
<b>Shield</b>	-	-	-	-	-	-

**Connector (M16x0.75) S3, 7-pin**

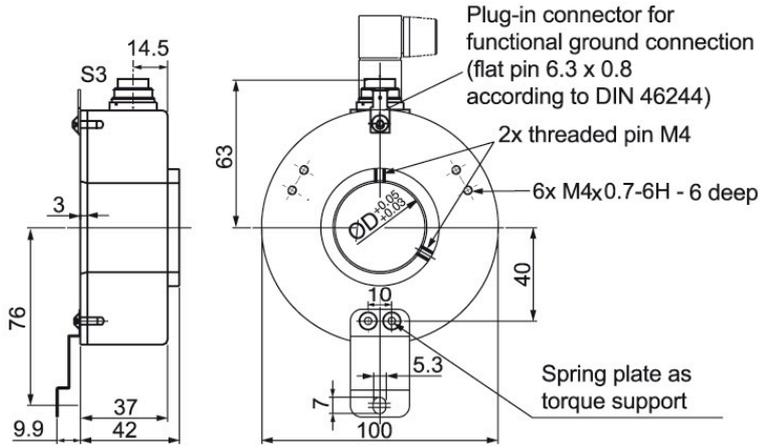

**Description**


**ABN inv. poss.**

**S3** radial, 7-pin, Connector connected to encoder housing

-

Assignments	
	S3
	7-pin
	
<b>Circuit</b>	F05, H05, F24, H24, H30
<b>GND</b>	1
<b>(+) Vcc</b>	2
<b>A</b>	3
<b>B</b>	4
<b>N</b>	5
<b>-</b>	-
<b>A inv.</b>	-
<b>B inv.</b>	-
<b>N inv.</b>	-
<b>n. c.</b>	6, 7
<b>Shield</b>	-

**Connector (M23) S5, 12-pin**

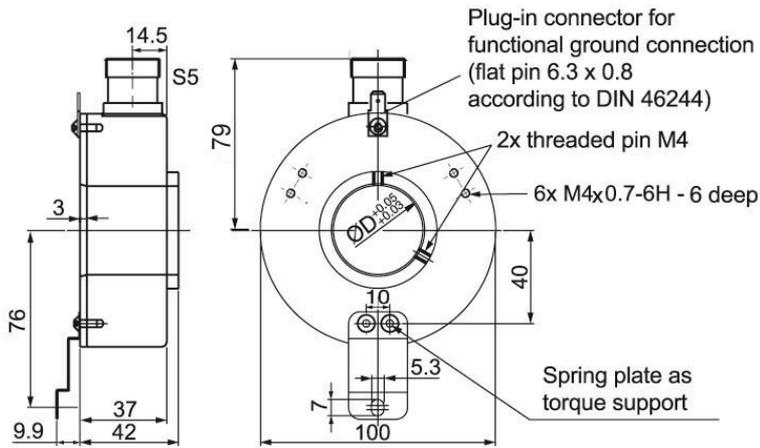

**Description**


ABN inv. poss.

S5 radial, 12-pin, Connector connected to encoder housing

•

Assignments			
	S5	S5	S5
	12-pin	12-pin	12-pin
<b>Circuit</b>	F05, H05, F24, H24, H30	P05, R05, P24, R24, 245, 645, R30	SIN
<b>GND</b>	10	10	10
<b>(+) Vcc</b>	12	12	12
<b>A</b>	5	5	5
<b>B</b>	8	8	8
<b>N</b>	3	3	3
<b>-</b>	-	-	-
<b>A inv.</b>	-	6	6
<b>B inv.</b>	-	1	1
<b>N inv.</b>	-	4	4
<b>n. c.</b>	1, 2, 4, 6, 7, 9, 11	2, 7, 9, 11	2, 7, 9, 11
<b>Shield</b>	-	-	-

**Connector (M23) S5R, 12-pin (clockwise)**

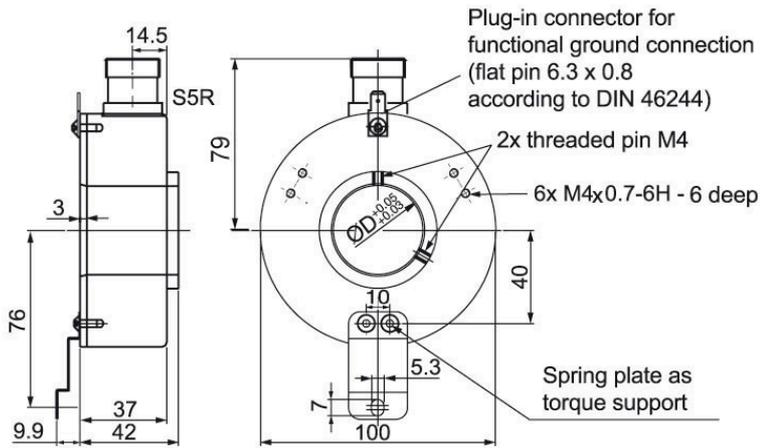

**Description**


ABN inv. poss.

S5R radial, 12-pin, Connector connected to encoder housing

•

Assignments			
	S5R	S5R	S5R
	12-pin	12-pin	12-pin
<b>Circuit</b>	F05, H05, F24, H24, H30	P05, R05, P24, R24, 245, 645, R30	SIN
<b>GND</b>	10	10	10
<b>(+) Vcc</b>	12	12	12
<b>A</b>	5	5	5
<b>B</b>	8	8	8
<b>N</b>	3	3	3
<b>-</b>	-	-	-
<b>A inv.</b>	-	6	6
<b>B inv.</b>	-	1	1
<b>N inv.</b>	-	4	4
<b>n. c.</b>	1, 2, 4, 6, 7, 9, 11	2, 7, 9, 11	2, 7, 9, 11
<b>Shield</b>	-	-	-

**Sensor-connector (M12x1) SC, 4-, 5-, 8-, 12-pin**

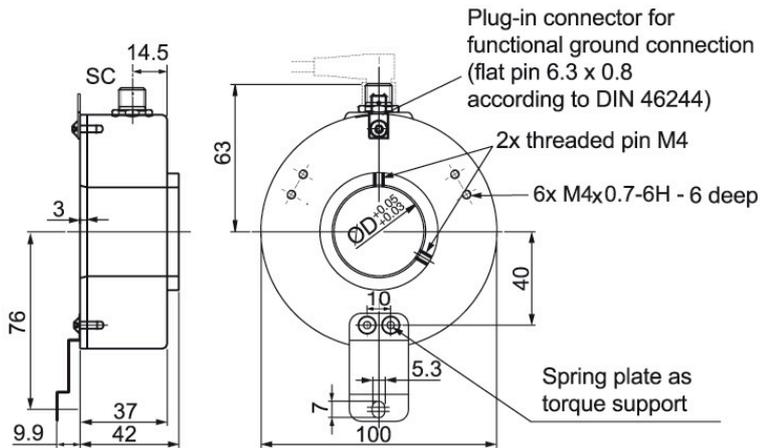

**Description**

**ABN inv. poss.**

<b>SC4</b>	radial, 4-pin, Connector connected to encoder housing	-
<b>SC5</b>	radial, 5-pin, Connector connected to encoder housing	-
<b>SC8</b>	radial, 8-pin, Connector connected to encoder housing	•
<b>SC12</b>	radial, 12-pin, Connector connected to encoder housing	•

Assignments					
	<b>SC4</b>	<b>SC5</b>	<b>SC8</b>	<b>SC8</b>	<b>SC12</b>
	<b>4-pin</b>	<b>5-pin</b>	<b>8-pin</b>	<b>8-pin</b>	<b>12-pin</b>
<b>Circuit</b>	F05, H05, F24, H24, H30	F05, H05, F24, H24, H30	P05, R05, P24, R24, R30, 245, 645	SIN	P05, R05, P24, R24, 245, 645, R30
<b>GND</b>	3	3	1	1	3
<b>(+) Vcc</b>	1	1	2	2	1
<b>A</b>	2	4	3	3	4
<b>B</b>	4	2	4	5	6
<b>N</b>	-	5	5	7	8
<b>-</b>	-	-	-	-	-
<b>A inv.</b>	-	-	6	4	9
<b>B inv.</b>	-	-	7	6	7
<b>N inv.</b>	-	-	8	8	10
<b>n. c.</b>	-	-	-	-	2, 5, 11, 12
<b>Shield</b>	-	-	-	-	-

**Options****Low temperature**

The encoder WDG 100H with the output circuit types F24, H24, P24, R24, F05, H05, P05, R05, 245, 645 is also available with the extended temperature range -40 °C up to +80 °C [-40 °F up to +176 °F] (measured at the flange).

**Order key****ACA****IP55 all around (not 1 Vpp Sin/Cos)**

The encoder WDG 100H can be supplied in a full IP55 version.

**Order key****ACP**

Max. RPM: 1500 rpm

Permitted Shaft-Loading, axial: 100 N [10.197 kp]

Permitted Shaft-Loading, radial: 120 N [12.236 kp]

Max. PPR: 20480 ppr

Starting-torque: approx. 5 Ncm [7.081 in-ozf] at ambient temperature

**Cable length**

The encoder WDG 100H can be supplied with more than 2 m cable. The maximum cable length depends on the supply voltage and the frequency; see <https://www.wachendorff-automation.com/download-gtd-incremental-encoders/>


Please extend the standard order code with a three figure number, specifying the cable length in decimetres.

Example: 5 m cable = 050

**Order key****XXX = Decimeter**

Example Order No.	Type				Your encoder
WDG 100H	WDG 100H				WDG 100H
<b>Bore size</b>					
25	25; 28; 30; 32; 38; 40; 42; 45				
<b>Pulses per revolution PPR:</b>					
1024	512, 1024, 2048, 2500, 3600, 4096, 4500, 5000, 8192, 10240, 16384, 20480 1 Vpp Sin/Cos only 1024, 2048 Other PPRs on request				
<b>Channels:</b>					
ABN	AB, ABN				
<b>Output circuit</b>					
H24	<b>Resolution PPR</b>	<b>Power supply VDC</b>	<b>Output circuit</b>	<b>-</b>	<b>Order key</b>
	up to 2500	5 - 30	HTL (TTL at 5 VDC)	-	H30
		5 - 30	HTL, inv. (TTL/RS422 comp. at 5 VDC)	-	R30
	up to 5000	4.75 - 5.5	TTL	-	H05
		4.75 - 5.5	TTL, RS422 comp., inverted	-	R05
		10 - 30	HTL	-	H24
		10 - 30	HTL inverted	-	R24
	8192 up to 20480	10 - 30	TTL, RS422 comp., inverted	-	245
		4.75 - 5.5	TTL	-	F05
		4.75 - 5.5	TTL, RS422 comp., inverted	-	P05
		10 - 30	HTL	-	F24
		10 - 30	HTL inverted	-	P24
	1024, 2048	4.75 - 5.5	TTL, RS422 comp., inverted	-	645
			1 Vpp sin/cos	-	SIN
<b>Electrical connections</b>					
K3	<b>Description</b>			<b>ABN inv. poss.</b>	<b>Order key</b>
	<b>Cable: length (2 m standard, WDG 58T: 1 m)</b>				
	radial, shield not connected			•	K3
	radial, shield connected to encoder housing			•	L3
	<b>Connector: (shield connected to encoder housing)</b>				
	connector, M16x0.75, 5-pin, radial			-	SH5
	connector, M16x0.75, 6-pin, radial			-	SH6
	connector, M16x0.75, 8-pin, radial			•	SH8
	connector, M16x0.75, 12-pin, radial			•	SH12
	connector, M16x0.75, 7-pin, radial			-	S3
	connector, M23, 12-pin, radial			•	S5
	connector, clockwise pin count, M23, 12-pin, radial			•	S5R
	sensor-connector, M12x1, 4-pin, radial			-	SC4
	sensor-connector, M12x1, 5-pin, radial			-	SC5
	sensor-connector, M12x1, 8-pin, radial			•	SC8
sensor-connector, M12x1, 12-pin, radial			•	SC12	
<b>Options</b>					
<b>Description</b>			<b>Order key</b>		
Low temperature			ACA		
IP55			ACP		
Without option			Empty		
Cable length			XXX = Decimeter		

<b>Example Order No.=</b>	WDG 100H	25	1024	ABN	H24	K3		WDG 100H						<b>Your encoder</b>
---------------------------	----------	----	------	-----	-----	----	--	----------	--	--	--	--	--	---------------------

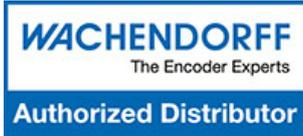

For further information please contact our local distributor.  
Here you find a list of our distributors worldwide.  
<https://www.wachendorff-automation.com/>

# WACHENDORFF

Wachendorff Automation GmbH & Co. KG  
Industriestrasse 7 • 65366 Geisenheim  
Germany

Phone: +49 67 22 / 99 65 25  
E-Mail: [wdg@wachendorff.de](mailto:wdg@wachendorff.de)  
[www.wachendorff-automation.de](http://www.wachendorff-automation.de)

