



Online Data sheet

Encoder WDG 80H

www.wachendorff-automation.com/wdg80h

Wachendorff Automation

... systems and encoders

- Complete systems
- Industrial rugged encoders to suit your application
- Standard range and customer versions
- Maximum permissible loads
- 48-hour express production
- Made in Germany
- Worldwide distributor network

Encoder WDG 80H



Illustration similar



- Rugged and economical encoder
- High protection class IP65
- Bore size: 10 mm up to 27 mm
- Full connection protection with 10 VDC up to 30 VDC
- With light reserve warning
- Easy mounting
- Optional: -40 °C up to +80 °C

www.wachendorff-automation.com/wdg80h

Resolution

Pulses per revolution PPR up to 3840 PPR

Mechanical Data

Flange	hollow shaft (through-bored)
Flange material	aluminum
Housing material	aluminum, powder coated
Torque supports	incl. 1 torque support WDGDS10001
- 1. Spring plate compensation	axial: ±0.8 mm [0.0315"], radial: ±0.2 mm [0.0079"]
Flange diameter	Ø 80 mm [Ø 3.15"]

Shaft(s)

Shaft material	stainless steel
Starting torque	approx. 6 Ncm [8.497 in-ozf] at ambient temperature
Fixing	2 x M4, DIN 913; Starting torque: 2,5 Nm

Shaft	Ø 10 mm [Ø 0.394"]
Shaft length	L: 46 mm [1.811"]
Insertion depth min.	14 mm [0.551"]
Max. Permissible shaft loading radial	200 N [20.394 kp]
Max. Permissible shaft loading axial	100 N [10.197 kp]

Shaft	Ø 12 mm [Ø 0.472"]
Shaft length	L: 46 mm [1.811"]
Insertion depth min.	14 mm [0.551"]
Max. Permissible shaft loading radial	200 N [20.394 kp]
Max. Permissible shaft loading axial	100 N [10.197 kp]

Shaft	Ø 14 mm [Ø 0.551"]
Shaft length	L: 46 mm [1.811"]
Insertion depth min.	14 mm [0.551"]
Max. Permissible shaft loading radial	200 N [20.394 kp]
Max. Permissible shaft loading axial	100 N [10.197 kp]

Shaft	Ø 15 mm [Ø 0.591"]
Shaft length	L: 46 mm [1.811"]
Insertion depth min.	14 mm [0.551"]
Max. Permissible shaft loading radial	200 N [20.394 kp]
Max. Permissible shaft loading axial	100 N [10.197 kp]

Shaft	Ø 16 mm [Ø 0.63"]
-------	-------------------

Shaft length	L: 46 mm [1.811"]
--------------	-------------------

Insertion depth min.	14 mm [0.551"]
----------------------	----------------

Max. Permissible shaft loading radial	200 N [20.394 kp]
---------------------------------------	-------------------

Max. Permissible shaft loading axial	100 N [10.197 kp]
--------------------------------------	-------------------

Shaft	Ø 18 mm [Ø 0.709"]
-------	--------------------

Shaft length	L: 46 mm [1.811"]
--------------	-------------------

Insertion depth min.	14 mm [0.551"]
----------------------	----------------

Max. Permissible shaft loading radial	200 N [20.394 kp]
---------------------------------------	-------------------

Max. Permissible shaft loading axial	100 N [10.197 kp]
--------------------------------------	-------------------

Shaft	Ø 20 mm [Ø 0.787"]
-------	--------------------

Shaft length	L: 46 mm [1.811"]
--------------	-------------------

Insertion depth min.	14 mm [0.551"]
----------------------	----------------

Max. Permissible shaft loading radial	200 N [20.394 kp]
---------------------------------------	-------------------

Max. Permissible shaft loading axial	100 N [10.197 kp]
--------------------------------------	-------------------

Shaft	Ø 25 mm [Ø 0.984"]
-------	--------------------

Shaft length	L: 46 mm [1.811"]
--------------	-------------------

Insertion depth min.	14 mm [0.551"]
----------------------	----------------

Max. Permissible shaft loading radial	200 N [20.394 kp]
---------------------------------------	-------------------

Max. Permissible shaft loading axial	100 N [10.197 kp]
--------------------------------------	-------------------

Shaft	Ø 27 mm [Ø 1.063"]
-------	--------------------

Shaft length	L: 46 mm [1.811"]
--------------	-------------------

Insertion depth min.	14 mm [0.551"]
----------------------	----------------

Max. Permissible shaft loading radial	200 N [20.394 kp]
---------------------------------------	-------------------

Max. Permissible shaft loading axial	100 N [10.197 kp]
--------------------------------------	-------------------

Bearings

Bearings type	2 precision ball bearings
---------------	---------------------------

Nominal service life	3 x 10 ¹⁰ revs. at 100 % rated shaft load 1 x 10 ¹¹ revs. at 40 % rated shaft load 1 x 10 ¹² revs. at 20 % rated shaft load
----------------------	--

Max. operating speed	3500 rpm
----------------------	----------

Machinery Directive: basic data safety integrity level

MTTF _d	200 a
Mission time (TM)	25 a
Nominale service life (L10h)	1 x 10 ¹² revs. at 20 % rated shaft load and 3500 rpm
Diagnostic coverage (DC)	0 %

Electrical Data

Power supply/Current consumption	4,75 VDC up to 5,5 VDC: typ. 70 mA
Power supply/Current consumption	5 VDC up to 30 VDC: typ. 70 mA
Power supply/Current consumption	10 VDC up to 30 VDC: typ. 70 mA
Operating principle	optical
Output circuit	TTL TTL, RS422 compatible, inv. HTL HTL, inv. 1 Vpp sin/cos
Pulse frequency	TTL ≤ 3840 ppr: max. 200 kHz HTL ≤ 3840 ppr: max. 200 kHz 1 Vpp sin/cos: max. 100 kHz
Channels	AB ABN and inverted signals
Load	max. 40 mA / channel @ 1 Vpp sin/cos: min. 120 Ohm
Circuit protection	circuit type H24 and R24 only

Accuracy

Phase offset	90° ± max. 7.5 % of the period duration
pulse-/pause-ratio	50 % ± max. 7 %

Environmental data

ESD (DIN EN 61000-4-2):	8 kV
Burst (DIN EN 61000-4-4):	2 kV
includes EMC:	DIN EN 61000-6-2 DIN EN 61000-6-3
Vibration: (DIN EN 60068-2-6)	50 m/s ² (10 Hz up to 2000 Hz)
Shock: (DIN EN 60068-2-27)	1000 m/s ² (6 ms)
Electrical Safety:	according DIN VDE 0160

Duty information

Customs tariff number:	90318020
Country of origin:	Germany

General Data


Weight	approx. 600 g [21.164 oz]
Connections	cable or connector, radial
Protection rating (EN 60529)	IP65 all around
Operating temperature	-20 °C up to +80 °C [-4 °F up to +176 °F] 1 Vpp: -10 °C up to +70 °C [+14 °F up to +158 °F]
Storage temperature	-30 °C up to +80 °C [-22 °F up to 176 °F]

More Information

General technical data and safety instructions
<http://www.wachendorff-automation.com/gtd>

Options
<http://www.wachendorff-automation.com/acc>


Cable connection K3, L3 with 2 m cable

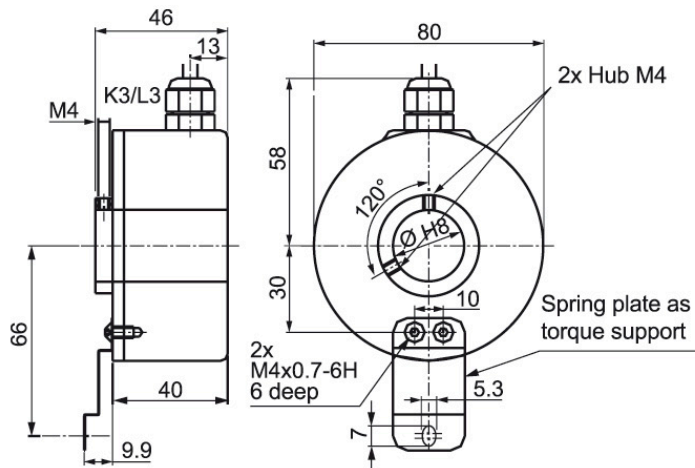

Description	ABN inv. poss.
K3 radial, shield not connected	•
L3 radial, shield connected to encoder housing	•

Assignments			
	K3, L3	K3, L3	L3
Circuit	H05, H24, H30	R05, R24, 245, R30	SIN
GND	WH	WH	WH
(+) Vcc	BN	BN	BN
A	GN	GN	GN
B	YE	YE	GY
N	GY	GY	BK
-	-	-	-
A inv.	-	RD	YE
B inv.	-	BK, (BU at ACA)	PK
N inv.	-	VT	VT
Shield	flex	flex	flex


Connector (M16x0.75) SH, 5-, 6-, 8-, 12-pin

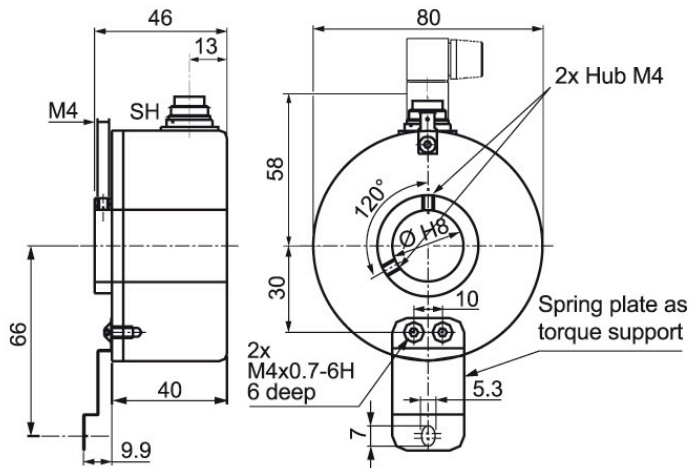

Description	ABN inv. poss.
SH5 radial, 5-pin, Connector connected to encoder housing	-
SH6 radial, 6-pin, Connector connected to encoder housing	-
SH8 radial, 8-pin, Connector connected to encoder housing	•
SH12 radial, 12-pin, Connector connected to encoder housing	•

Assignments						
	SH5	SH6	SH8	SH8	SH12	SH12
	5-pin	6-pin	8-pin	8-pin	12-pin	12-pin
Circuit	H05, H24, H30	H05, H24, H30	R05, R24, R30, 245	SIN	R05, R24, 245, R30	SIN
GND	1	6	1	1	K, L	K, L
(+) Vcc	2	1	2	2	M, B	M, B
A	3	2	3	3	E	E
B	4	4	4	4	H	H
N	5	3	5	5	C	C
-	-	-	-	-	-	-
A inv.	-	-	6	6	F	F
B inv.	-	-	7	7	A	A
N inv.	-	-	8	8	D	D
n. c.	-	5	-	-	G, J	G, J
Shield	-	-	-	-	-	-

Connector (M16x0.75) S3, 7-pin

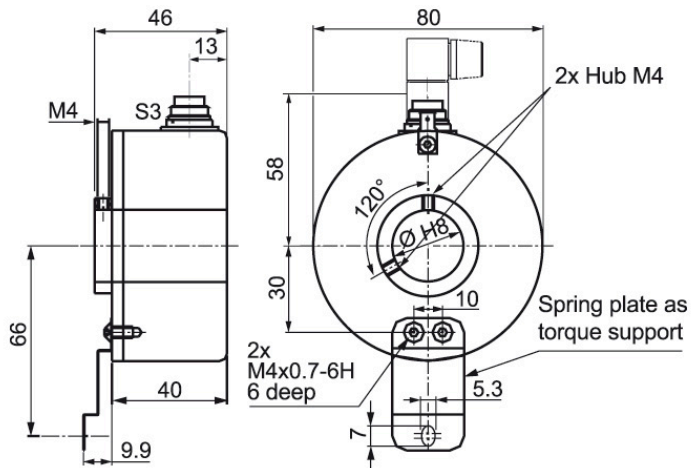


Description	ABN inv. poss.
-------------	----------------

S3	radial, 7-pin, Connector connected to encoder housing	-
-----------	---	---

Assignments	
	S3
	7-pin
	
Circuit	H05, H24, H30
GND	1
(+) Vcc	2
A	3
B	4
N	5
-	-
A inv.	-
B inv.	-
N inv.	-
n. c.	6, 7
Shield	-

Connector (M23) S5, 12-pin

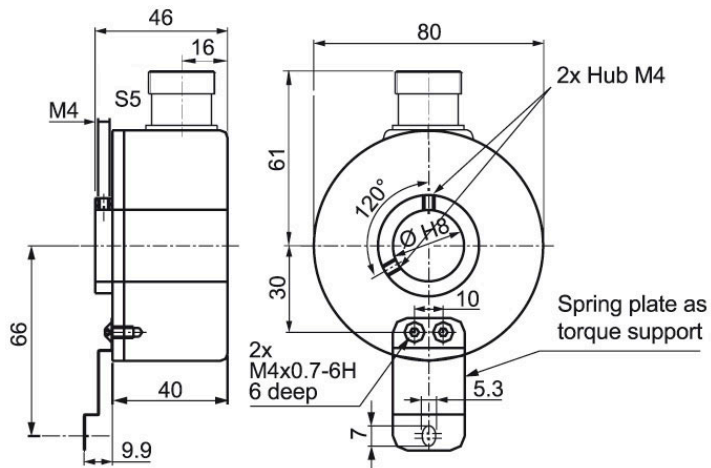


Description	ABN inv. poss.
-------------	----------------

S5 radial, 12-pin, Connector connected to encoder housing •

ABN inv. poss.

Assignments			
	S5	S5	S5
	12-pin	12-pin	12-pin
Circuit	H05, H24, H30	R05, R24, 245, R30	SIN
GND	10	10	10
(+) Vcc	12	12	12
A	5	5	5
B	8	8	8
N	3	3	3
-	-	-	-
A inv.	-	6	6
B inv.	-	1	1
N inv.	-	4	4
n. c.	1, 2, 4, 6, 7, 9, 11	2, 7, 9, 11	2, 7, 9, 11
Shield	-	-	-

Connector (M23) S5R, 12-pin (clockwise)

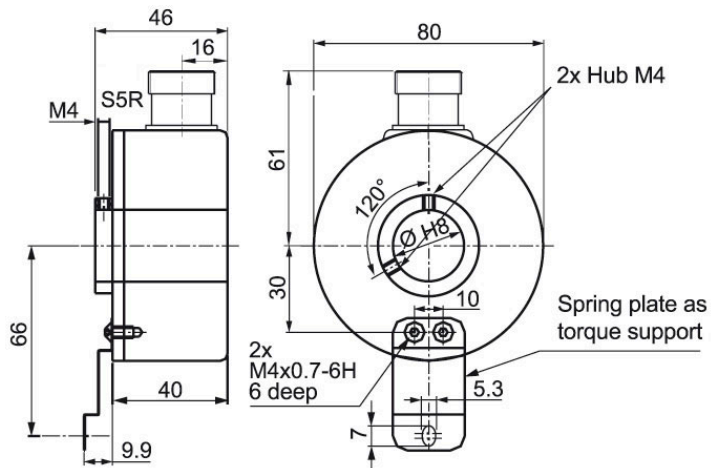

Description


ABN inv. poss.

S5R radial, 12-pin, Connector connected to encoder housing

•

Assignments			
	S5R	S5R	S5R
	12-pin	12-pin	12-pin
Circuit	H05, H24, H30	R05, R24, 245, R30	SIN
GND	10	10	10
(+) Vcc	12	12	12
A	5	5	5
B	8	8	8
N	3	3	3
-	-	-	-
A inv.	-	6	6
B inv.	-	1	1
N inv.	-	4	4
n. c.	1, 2, 4, 6, 7, 9, 11	2, 7, 9, 11	2, 7, 9, 11
Shield	-	-	-

Sensor-connector (M12x1) SC, 4-, 5-, 8-, 12-pin

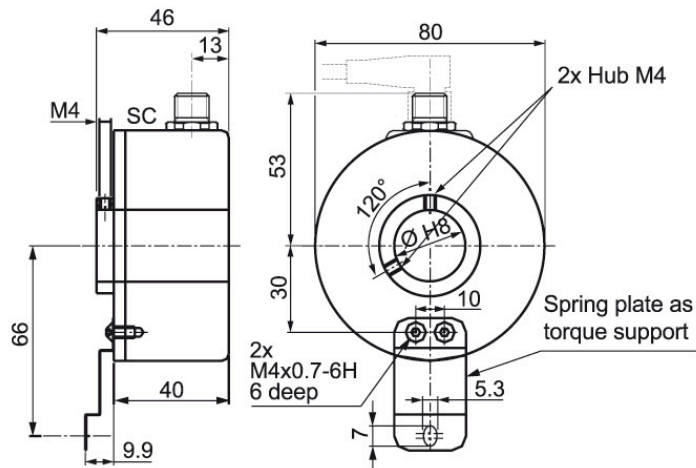

Description	ABN inv. poss.
SC4 radial, 4-pin, Connector connected to encoder housing	-
SC5 radial, 5-pin, Connector connected to encoder housing	-
SC8 radial, 8-pin, Connector connected to encoder housing	•
SC12 radial, 12-pin, Connector connected to encoder housing	•

Assignments					
	SC4	SC5	SC8	SC8	SC12
	4-pin	5-pin	8-pin	8-pin	12-pin
Circuit	H05, H24, H30	H05, H24, H30	R05, R24, R30, 245	SIN	R05, R24, 245, R30
GND	3	3	1	1	3
(+) Vcc	1	1	2	2	1
A	2	4	3	3	4
B	4	2	4	5	6
N	-	5	5	7	8
-	-	-	-	-	-
A inv.	-	-	6	4	9
B inv.	-	-	7	6	7
N inv.	-	-	8	8	10
n. c.	-	-	-	-	2, 5, 11, 12
Shield	-	-	-	-	-

Options

Low temperature

The encoder WDG 80H with the output circuit types 245, H05, H24, R05, R24 is also available with the extended temperature range -40 °C up to +80 °C [-40 °F up to +176 °F] (measured at the flange).

Order key

ACA

Cable length

The encoder WDG 80H can be supplied with more than 2 m cable. The maximum cable length depends on the supply voltage and the frequency; see <https://www.wachendorff-automation.com/download-gtd-incremental-encoders/>

Please extend the standard order code with a three figure number, specifying the cable length in decimetres.


Example: 5 m cable = 050

Order key

XXX = Decimeter

Example Order No.	Type					Your encoder
WDG 80H	WDG 80H					WDG 80H
	Bore size					
25	10; 12; 14; 15; 16; 18; 20; 25; 27					
	Pulses per revolution PPR:					
1024	50, 100, 250, 500, 720, 1000, 1024, 2048, 2500, 3840 1 Vpp Sin/Cos only 1024 Other PPRs on request					
	Channels:					
ABN	AB, ABN					
	Output circuit					
	Resolution PPR	Power supply VDC	Output circuit	-	Order key	
H24	up to 2500	5 - 30	HTL (TTL at 5 VDC)	-	H30	
		5 - 30	HTL, inv. (TTL/RS422 comp. at 5 VDC)	-	R30	
	up to 3840	4.75 - 5.5	TTL	-	H05	
		4.75 - 5.5	TTL, RS422 comp., inverted	-	R05	
		10 - 30	HTL	-	H24	
		10 - 30	HTL inverted	-	R24	
		10 - 30	TTL, RS422 comp., inverted	-	245	
		1024	4.75 - 5.5	1 Vpp sin/cos	-	SIN
	Electrical connections					
	Description	ABN inv. poss.	Order key			
K3	Cable: length (2 m standard, WDG 58T: 1 m)					
	radial, shield not connected	•	K3			
	radial, shield connected to encoder housing	•	L3			
	Connector: (shield connected to encoder housing)					
	connector, M16x0.75, 5-pin, radial	-	SH5			
	connector, M16x0.75, 6-pin, radial	-	SH6			
	connector, M16x0.75, 8-pin, radial	•	SH8			
	connector, M16x0.75, 12-pin, radial	•	SH12			
	connector, M16x0.75, 7-pin, radial	-	S3			
	connector, M23, 12-pin, radial	•	S5			
	connector, clockwise pin count, M23, 12-pin, radial	•	S5R			
	sensor-connector, M12x1, 4-pin, radial	-	SC4			
	sensor-connector, M12x1, 5-pin, radial	-	SC5			
	sensor-connector, M12x1, 8-pin, radial	•	SC8			
	sensor-connector, M12x1, 12-pin, radial	•	SC12			
		Options				
	Description	Order key				
Low temperature	ACA					
Without option	Empty					
Cable length	XXX = Decimeter					

Example Order No. =	WDG 80H	25	1024	ABN	H24	K3		WDG 80H							Your encoder
----------------------------	---------	----	------	-----	-----	----	--	---------	--	--	--	--	--	--	---------------------



For further information please contact our local distributor.
Here you find a list of our distributors worldwide.
<https://www.wachendorff-automation.com/contact-en/wachendorff-world-wide/>

WACHENDORFF

Wachendorff Automation GmbH & Co. KG
Industriestrasse 7 • 65366 Geisenheim
Germany

Phone: +49 67 22 / 99 65 25
E-Mail: wdg@wachendorff.de
www.wachendorff-automation.de

